

Drum Transporter and Pouring Stand

For 210 litre steel drums

Capacity 350kg

Welded steel construction.

Removable 2-position handle

Wheels: 2 x 400 mm dia. 2 x 160mm dia. castors, with solid rubber tyres.

4 nylon drum rollers and strap supplied.

L x W : 1250 x 780mm

Height of bung 440mm

Finish: Red epoxy

Weight: 48kg

Ref: **DT32**

Optional extras

Hook-on drip tray

Ref: **DS33**

Replacement strap

Ref: **STP2**



Drum Trolley and Pouring Stand

For 210 litre steel drums

Capacity 250kg

Choose pneumatic or solid tyred wheels:

2 x 400 mm dia.

4 Nylon drum rollers and strap supplied.

L x W x H : 1220 x 800 x 510 mm

Height of bung 360mm

Finish: Blue epoxy

Tyres	Wt.	Ref
Pneumatic	22kg	DT30P
Solid	35kg	DT30



For the transportation of 210 litre drums in the vertical position.

Low Loading Drum Carrier

Capacity 250kg

Fully welded construction.

2 x 200 mm dia. wheels with bright zinc plated steel centres, roller bearings and solid rubber tyres.


Castor: Swivel rear castor with 125 mm dia. bright zinc plated steel centred wheel, roller bearing and total stop brake fitted as standard.

O/A H x L x W: 890 x 800 x 810 mm

Underside of drum: 25 mm. Ground clearance: 15 mm

Finish: Red epoxy. Weight: 24 kg

Ref: **DT42**

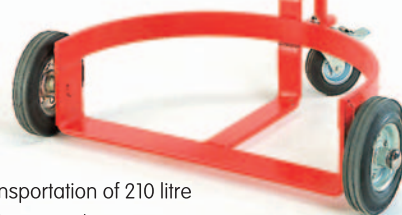

As manufacturers we are pleased to quote for drum movers for any specific diameter of Kegs, Drums, Containers or Rolls.



Model DT60

Pallet Loading Drum Truck Capacity 300kg

Designed to assist loading and unloading 210 litre drums onto pallets or platforms etc. with sliding drum retention clamp.

O/A dimensions: H x L x W

1100 x 1660 x 610 mm

Weight: 29 kg

Finish: Blue epoxy

Wheels: 2 x 250 mm dia. and

2 x 200 mm dia. with roller bearings and solid rubber tyres.

Steel Drum Loader

Ref: **DT60**

Optional extra

Clamp for Plastic Drums

(can be retro fitted) Weight: 6kg

Ref: **DT61**



Clamp for plastic drums



Three-in-one Drum Carrier

Capacity: steel drum 360kg; plastic drum 250kg

Simple lever action lifts drum for transportation, and further movement of lever allows drum to be rotated through 360°

Drum held securely in 200mm wide steel girdle harness with two ratchet clamps.

Height adjustment for easy loading of heavy drums.

O/A H x W x D (with handle in horizontal position):

1030 x 895 x 1280mm

Fitted with 2 x 250mm dia wheels and 1 x 160mm dia swivel, braked castor. All tyres, solid rubber.

Finish: Red epoxy

Weight: 54kg

Ref: **DT80**



For transport and dispensing from 210ltr steel or plastic drums



Drum Handling



Drum Tilt Lever

**For 210 litre steel drums
for tilting and upending only**

Wide twin tubular handle.

Cross member with rim hook.

Overall L x W 1300 x 400 mm

Finish: Blue epoxy

Weight: 6kg

Ref: **DT50**



Up-Down Ender

For 210 litre steel drums

For up-ending and down-ending steel drums

L x W: 1725 x 250mm; O/A handle width 600mm

Weight 8kg

Finish: blue epoxy

Ref: **DT51**



**48
HOURS
DESPATCH**

Drum Trucks Capacity 300kg

For 210 litre steel drums

Standard or 4-wheel design

Standard 2-wheel with rear bar support

4-wheel with rear swivel castors.

Helps operator move and manoeuvre loaded truck.

Tubular and hollow section construction
with centre beam adjustable drum
retaining hook

Choice of solid or pneumatic tyres.

Finish: Blue epoxy

Red plastic standard hand grips.



Rear bar
Model DT20

Optional extra

Protective
Hand Grips

Ref: **E010** (pair)



4-wheel
Model DT25




4-wheel
Model DT27



4-wheel
Model DT24

Wheel Configuration	Tyre Type	Wheel dia. mm	Rear castors no. x dia. mm	Wt kg	Ref
Standard 2-wheel (rear bar support)	Solid	250	-	20	DT20
		400	-	34	DT21
	Pneumatic	260	-	18	DT22
		400	-	21	DT23
4-wheel (rear castor support)	Solid	250	2 x 125	21	DT24
		400	2 x 160	36	DT25
	Pneumatic	260	2 x 125	19	DT26
		400	2 x 160	23	DT27

**Static stand DS17****Mobile stand DS16**
2 axles, fixed nylon wheels 100 x 40mm
48
HOURS
 DESPATCH
**Mobile stand DS15**
2 swivel, 2 fixed castors,
80mm nylon wheels**Mobile stand with drum rotation DS24**
2 fixed outrigger wheels 150 x 40 mm.
2 swivel castors nylon wheels 80 x 35 mm
INDUSTRY
FAVOURITE
Ever popular
Fully equipped
Model DS19
 Full specification and price
 see next page

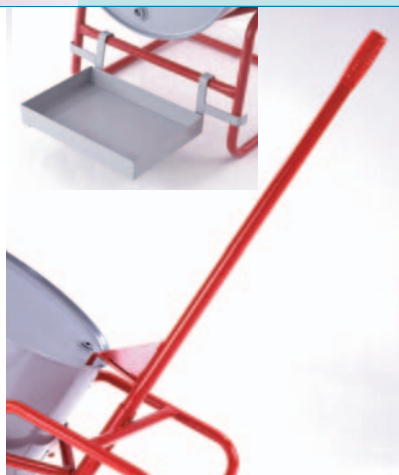Optional extras
 For any model
Hook on Drip Tray
 L x W x H 387 x 280 x 50mm
 Available for all drum stands.
 Ref **DS30**
Tilt Lever (factory fitted)
 Length 1070 mm with hand grip
 Ref **DS29**

 All drum stands on this page
 available with or without nylon
 drum rotation rollers


Without Drum Rotation		With Drum Rotation		L x W x H mm
Ref	Wt	Ref	Wt	
DS17	9	DS27	11	880 x 585 x 490
DS16	11	DS26	13	880 x 585 x 530
DS15	16	DS25	18	880 x 585 x 560
DS14	13	DS24	15	880 x 725 x 580

Drum Handling



Model DS19

INDUSTRY
FAVOURITE

Mobile drum stand

Fully equipped DS19

Capacity 250kg

For 210 litre steel drums

Welded steel construction

- 2 fixed outrigger wheels 150 x 40mm
- 2 swivel castors nylon wheels 80 x 35mm
- Tilt lever and drum rotation rollers

Finish: Red epoxy

O/A L x W x H: 880 x 725 x 580mm

Weight 17kg

Ref: **DS19**

Optional extra:

Hook-on sheet steel drip tray

Ref: **DS30**



48
HOURS
DESPATCH

Drum Stands

For plastic drums

Capacity 250 kg

Flat steel drum support cradles

Standard width 630 mm

Fully welded construction

Finish: Red epoxy.

Optional extra

Hook-on drip tray

Ref: **DS31**



DS07 Stand only

Universal Drum Truck

Suitable for steel, plastic or fibre drums

Welded construction flat and tube steel.

200 mm dia. wheels with roller bearings.

Overall size H x W 1330 x 660 mm

Finish: Red epoxy

Weight: 15 kg

Ref: **DT250**

DS09 Mobile with tilt lever
Tilt lever length 1070 mm



DS08 Mobile stand



Fitted with
adjustable quick
release strap

Type	Wheels	L x H mm	Wt kg	Ref
Stand only	-	880 x 500	15	DS07
Mobile stand	2 swivel 2 fixed 80mm nylon wheel castors	880 x 580	17	DS08
Mobile with tilt	2 swivel 2 fixed 80mm nylon wheel castors	880 x 580	21	DS09

Drum Pincer



Capacity: 500kg

For lifting 210 Litre open top and tight head steel drums.
Fitted with 20mm steel pin for attaching to overhead lifting gear or fork lift adaptor beam.
The jaw grips climb of drum and the vertical bar keeps the drum steady.
All steel construction.
Finish: Orange epoxy.
Weight: 12 kg
Test certificate supplied
Ref **MDC6**

Manual Drum Tongs

Capacity: 360kg

For lifting 210 Litre open top and tight head steel drums with L or XL rings
Welded gripping hooks.
Fitted with 20mm dia steel pin for attaching to overhead lifting gear or fork lift adaptor beam.
Finish: Orange epoxy.
Weight: 4 kg
Test certificate supplied
Ref **MDC5**



Horizontal Drum Tongs

Capacity: 500kg

For lifting 210 Litre tight head steel drums, using overhead lifting gear or fork lift adaptor beam.
Finish: Orange epoxy.
Weight: 3 kg
Test certificate supplied
Ref **MDC10**



3 wheeled Dolly

Capacity 270 kg

Suitable for 130 or 210 litre drums
O/A H x Dia: 120 x 800mm
Load height 55mm
3 x 80mm dia nylon swivel castors.
Finish: Red epoxy
Weight 8kg
Ref: **DT12**

Circular Drum Dolly

Capacity 300 kg


Flat steel braces with 4 nylon wheels
80 mm dia. in swivel castor housings.
Flat steel circular retention ring 610 mm internal dia.
Finish: Red epoxy
Weight 9kg
Ref: **DT10**



4 Wheel Drum Dolly

Capacity 500 kg

Max drum dia. 610 mm
Immensely strong fabricated construction
4 nylon wheels in ball bearing swivel castors.
80 mm wheel dia. with thread guards.
Finish: Red epoxy
Weight 11kg
Ref: **DT11**

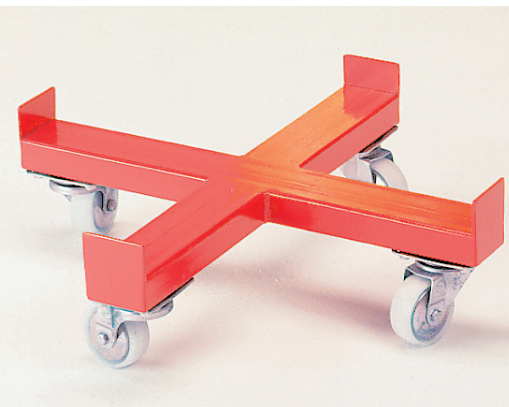

Drum Handling



Drum Rotator

Capacities:

Steel drum 360kg

Plastic drum 250kg

Fully rotate drums through 360°

Drum held securely in 200mm wide steel girdle harness with 2 ratchet clamps

Rotator secured to forks by 'T' bar clamping screws

Finish: Yellow or orange epoxy.

Test certificate supplied.

Overall W x D x H: 1200 x 800 x 390mm

Fork pockets W x H: 165 x 50mm

Fork centres: 800mm

Weight: 50kg

Max load: 360kg steel : 250kg plastic

Orange ref: **MDC12**

Yellow ref: **MDC12Y**

Horizontal Drum Tongs

Capacity 500kg



48 HOURS
DESPATCH
ON MARKED PRODUCTS

Adaptor Beam with Swivel Hook


Use your fork lift truck as a mobile crane. Adaptor beam fitted with forged steel shackle with a swivel hook. Suitable for use with drum handling attachments and other secure lifting duties.

Adaptor beam must be fitted at the load centre as specified by the fork lift truck manufacturer.

Finish: Yellow or orange epoxy.

Test certificate supplied.

W x D x H mm	Fork pockets mm	Fork centre mm	Capacity kg	Wt kg	Orange Ref	Yellow Ref
550 x 200 x 200	125 x 40	450	500	15	MDC305	MDC305Y
595 x 200 x 210	135 x 50	500	1000	16	MDC310	MDC310Y
625 x 200 x 235	150 x 75	450	2000	17	MDC320	MDC320Y

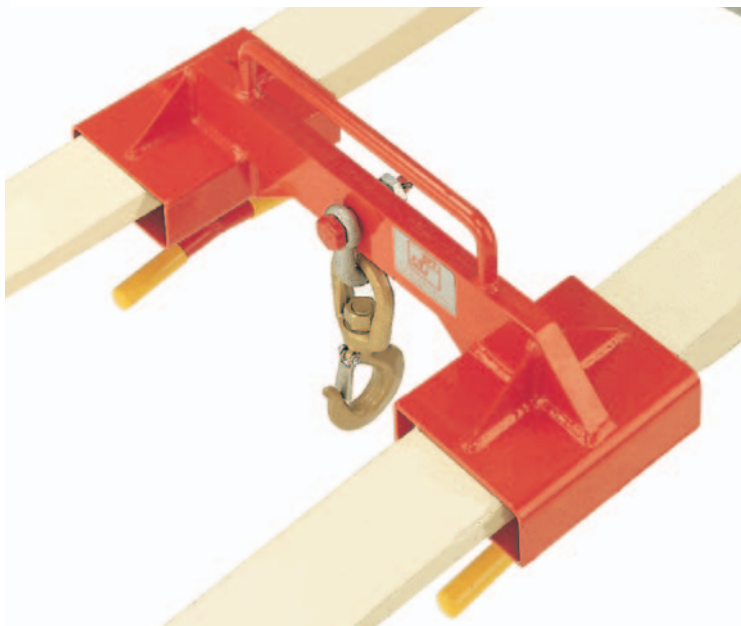

For lifting 210 Litre tight head steel drums, using overhead lifting gear or fork lift adaptor beam.

To operate, set locking lever in locked open position. When central over the horizontal drum, release locking lever to allow hooks to fall and locate under both rims. Hooks automatically engage as drum is lifted, and automatically released when drum is set down.

Suitable for 210 Litre steel drums 760 - 910 mm long.

Test certificate supplied.

Finish: Yellow or orange epoxy

Plastic hand grip.

Weight: 9 kg

Orange Ref **MDC4**

Yellow Ref **MDC4Y**

48 HOURS
DESPATCH
ON MARKED PRODUCTS

210 Litre drum Clamp

Lift 210 Litre steel drums with rolling hoops with the drum clamp attachment
Clamp fits over forks and is secured with 'T' bar clamping screws.

The two drum fingers have adjusting bolts complete with lock nuts fitted to the underside to enable the fingers to be adjusted parallel.

Finish: Yellow or orange epoxy.

To operate: locate the clamp on to steel drum with jaws under the top rolling hoop. The jaws will automatically close and open as the drum is raised and lowered to the floor.


Test certificate supplied

210 Litre drum Clamp

Specifications

For drum size	Litres	210
Overall W x L x H	mm	580 x 840 x 110
Fork pocket W x H	mm	170 x 50
Fork centres	mm	380
Weight	Kg	27
Maximum load	kg	500

Orange Ref	MDC1
Yellow Ref	MDC1Y

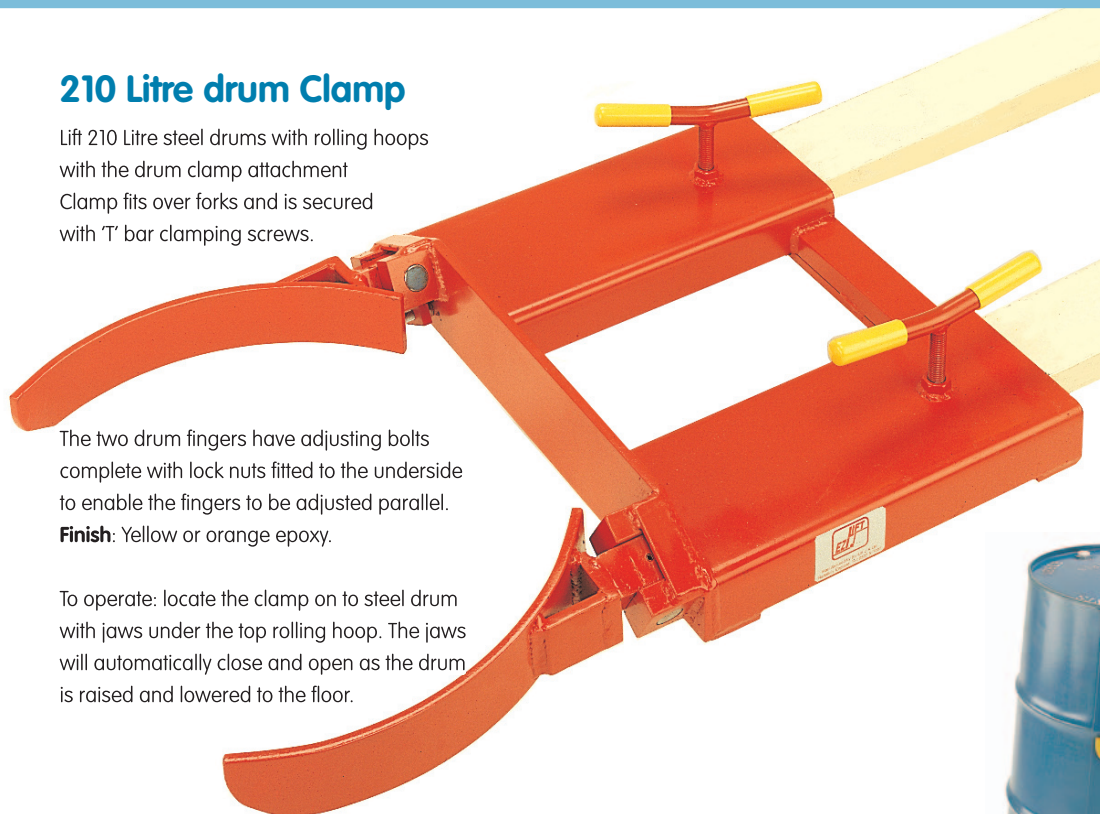

210 Litre double drum Clamp

Similar to single drum clamp, but can lift a single or two 210 Litre steel drums with rolling hoops.
Clamp fits over forks of fork truck and is secured with 'T' bar clamping screws.

Finish: Yellow or orange epoxy.


Test certificate supplied

210 Litre double drum Clamp

Specifications

For drum size	Litres	210
Overall W x L x H	mm	1220 x 1070 x 140
Fork pocket W x H	mm	170 x 50
Fork centres	mm	380
Weight	Kg	48
Maximum load	kg	1000

Orange Ref	MDC2
Yellow Ref	MDC2Y

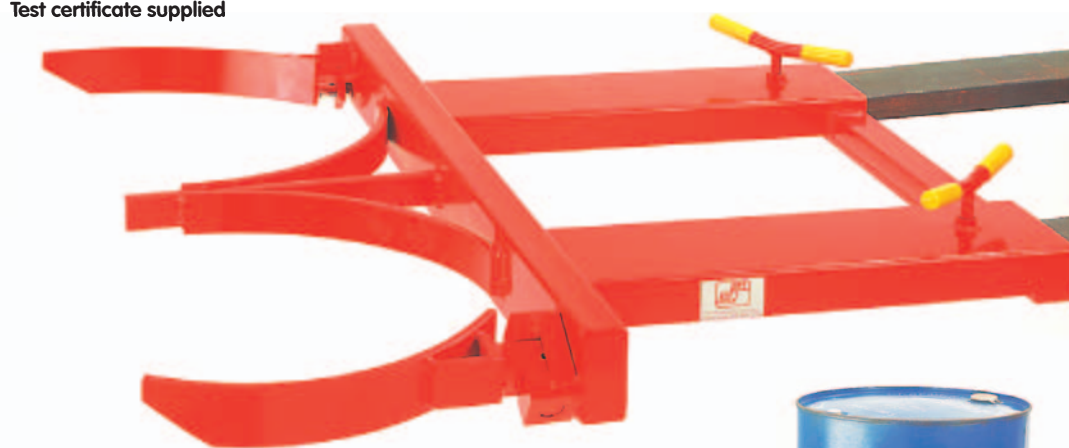

Drum Storage

Drum Tines

Fork truck attachment for transporting 210 litre open top and tight head drums in the horizontal position. Drum tines fit over forks and are secured in position with "T" bar clamping screws. Finish: Yellow or orange epoxy. **Test certificate supplied.**



Specifications			
For drum size	Litres	210	
Overall W x L x H	mm	605 x 1240 x 140	
Fork pocket W x H	mm	170 x 50	
Fork centres	mm	380	
Weight	Kg	36	
	Orange Ref	MDC9	
	Yellow Ref	MDC9Y	



Drum Claw

Designed for transporting of 210 ltr tight head drums. Spring loaded hardened steel jaws grip the chime or rim of the drum. Secured to forks by 'T' bar clamping screws. Finish: Yellow or orange epoxy. **Test certificate supplied.**

Overall W x D x H: 550 x 660 x 600mm
 Fork pockets W x H: 160 x 40mm
 Fork centres: 380mm
 Weight: 35kg
 Max load: 250kg
 Orange ref: **MDC11**
 Yellow ref: **MDC11Y**



High Drum Stand **Mobile or static**

Capacity 250 kg

Ideal for use as dispensing station

All welded flat and tube steel. Blue epoxy finish. Wheels on mobile version are: 2 fixed (axle mounted) and 2 swivel castors complete with total stop brakes as standard. 80 mm dia. hardwearing and oil resistant nylon wheels.

Type	L x W x H mm	Wt kg	Ref
Static	730 x 537 x 1020	14	DT28
Mobile	770 x 645 x 1060	17	DT29





Stacking Drum Pallet Racking System

Flexible, expandable storage system for 200/220 litre steel drums

Pallet Unit: Holds 2 drums. Strong welded steel construction stackable pallet.

O/A H x W x D: 890 x 1490 x 615mm

Fork pockets W x H: 240 x 70mm suitable for maximum width over forks 920mm

Distance between pockets 430mm

Pallet feet 127mm square

Maximum stacking 3 units high

Finish: Orange epoxy.



Sump Unit: Capacity 250 litres

Formed from 3mm sheet steel, fully welded seams.

O/A H x W x D: 300 x 1250 x 1000 mm

Ground clearance 100mm

Finish: Grey epoxy.



Optional extras - retro fitted

Drum rotating sets: fitted with 4 x 65mm dia. nylon rollers. Drops onto pallet unit
1 set per drum position. Zinc plated finish.



Dispenser stand hooks onto pallet
O/A H x W x D: 330 x 340 x 290mm
Grey epoxy finish.

Component	wt	Ref
Pallet Unit	50 kg	DS100
Sump Unit	70kg	DS2
Optional extras		
Drum rotation set (per drum)	4kg	DS101
Drum retaining bars (each)	6 kg	DS102
Dispenser stand	6kg	DS103

Drum retaining bars, for added stability when moving pallets. 1420 x 170 x 40mm
Orange epoxy finish.



DS10

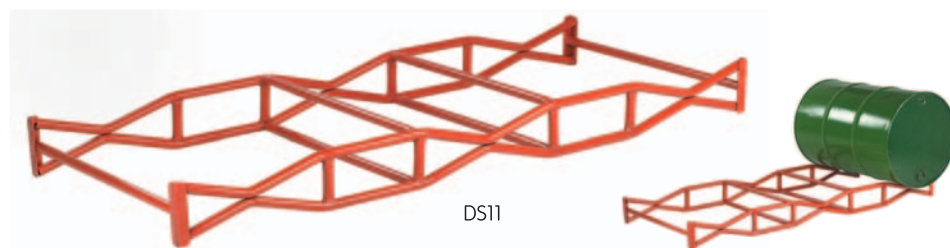

DS11

Drum Pallet - 2 or 3 drum

Suitable for 210 litre steel drums.

Tubular welded construction for hard rugged use.

Sheet steel fork sleeves / tubular frame.

Stacks a maximum of 3 units high, with total maximum load 1000 kg

Overall size

DS10: L x W 1350 x 600 mm

DS11: L x W 1775 x 715mm

Finish: Red epoxy.

Weight: 16 kg

2 bay - Ref: **DS10**

3 bay - Ref: **DS11**



Drum Sump Storage System

Vertical drums



DS401

Drum sump for 2 vertical drums - capacity 250 ltrs
removable galvanised steel support grid
o/a L x W x H: 1365 x 735 x 345mm



DS402

Drum sump for 4 vertical drums - capacity 470 ltrs
removable galvanised steel support grid
o/a L x W x H: 1365 x 1365 x 345mm



DS402

Drum Sump Storage System

Designed to store drums either vertically or horizontally for ease of use and access.

In case of leakage, sumps designed to hold more than the contents of the drum.

Products designed to assist conformance with Environmental Duties of Care and Oil Storage Regulations (England) 2001.

Sump capacity >125% of drum contents. Fully welded sump covered with removable galvanised steel grid and retaining chain (vertical stores only).


Stores without roofs fitted with 125mm pallet feet for ease of stacking. Maximum stack 3 high.

All sumps fully welded liquid tight, fitted with drain plug and fork locators.



MS117

Option: drain tap



DS412 in use



DS402 + DS411



DS411

Drum stand to take 2 horizontal drums fits over DS402
o/a L x W x H: 1375 x 540 x 940mm



DS412

Drum rotation frame for 1 horizontal drum, fits over DS411, DS406, DS407 or DS408
Nylon wheels allow full rotation of drum
o/a L x W x H: 480 x 745 x 495mm



DS404

Drum sump with back and 2 sides for 4 vertical drums - 470ltr capacity sump
Stackable 3 high
o/a L x W x H: 1440 x 1440 x 1500mm



DS408

Drum sump with back and 2 sides for 4 horizontal drums
Stackable 2 high
o/a L x W x H: 1440 x 1440 x 2130mm



DS406

Drum sump with back and 2 sides for 2 horizontal drums - 470 ltr capacity sump
Stackable 3 high
o/a L x W x H: 1440 x 1440 x 1500mm

Drum Sump Storage System

59



DS405



DS405



DS405



DS407

Enclosed Drum Sump Storage System

Fully enclosed drum storage with integral sump

Fixed sump, back and 2 sides, hinged roof and twin hinged doors with lock

DS405: 4 vertical drums or

DS407: 2 horizontal drum storage

DS409: 4 horizontal drum storage (H: 2130mm)

(drum rotation frame DS412 fits DS407 - see previous page)

Sump capacity 470 ltrs

Fork locators

o/a L x W x H: 1440 x 1440 x 1500mm

All drum sump storage systems
comply with the Control of
pollution Oil Storage England
regulations 2001



DS403

Mobile Drum Sump trolley/dispenser

Drum trolley with integral sump

Sump trolley for 2 vertical or 1 horizontal drum

when used with drum rotation frame

Sump capacity 250 ltrs

Removable galvanised steel support grid and
drain plug.

o/a L x W x H: 1405 x 735 x 970mm

2 fixed, 2 swivel castors with 125mm nylon wheels
and roller bearings

Braked castors available as option.

Fitted with tubular push handle and fork locators



DS403 + DS410



DS410

Drum rotation frame to fit drum sump trolley.
Ideal for transport and dispensing purposes.
4 nylon wheels allow full rotation of drum in
horizontal position.

o/a L x W x D: 480 x 505 x 155mm



Wheels on DS403 -

125mm dia nylon wheels on 2 fixed and
2 swivel castors with roller bearings

Braked option ref B175

Cylinder Storage





Static Cylinder Stands



Welded steel construction with cylinder support and sheet steel base, cylinder retention chains are fitted as standard.

Finish: Blue epoxy.

Each unit holds two cylinders, multiple units can be joined to each other, either side by side or back to back, or both, to build up banks of stands for high capacity storage.

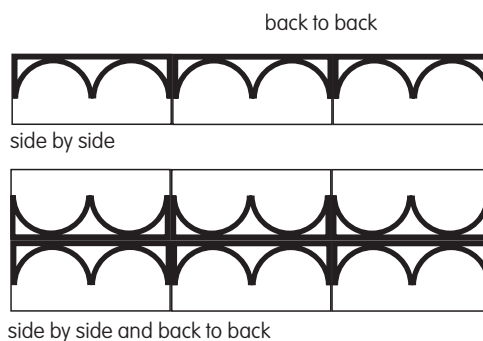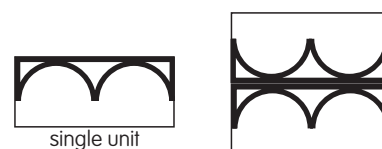

Supplied with pre-drilled fixing holes (fixings not supplied).

Cylinder Wall Racks

These racks must be fixed to the wall at a height of at least two-thirds of cylinder height.
Supplied with pre-drilled fixing holes. (fixings not supplied)

Cylinder sizes:
100–180 mm dia. and
140 – 270 mm dia.

All racks fitted with steel link retention chains.

Finish: Blue epoxy

Cylinder dia. mm		100 - 180		140 - 270	
No. cylinders		2	3	2	3
Width	mm	538	765	765	1045
Depth	mm	155	155	195	195
Weight	kg	2	3	3	4
Ref		SC200	SC201	SC202	SC203

Floor Fixing Cylinder Racks

Single or double sided for 2, 3, 4 or 6 cylinders.

Single sided units have rear frames pre-drilled.

We strongly recommend that single sided units are fixed to the wall.

Fully welded construction throughout.
Steel link retention chains fitted.
Finish: Blue epoxy.



Bases supplied pre-drilled for floor fixing (fixings not supplied)

		Single Sided				Double Sided			
Cylinder dia.		100 - 180mm		140 - 270mm		100 - 180mm		140 - 270mm	
No. cylinders		2	3	2	3	4	6	4	6
Width	mm	540	770	725	1040	540	770	725	1040
Depth	mm	370	370	400	400	685	685	685	685
Weight	kg	12	13	13	14	14	15	15	16
Ref		SC300	SC301	SC302	SC303	SC304	SC305	SC306	SC307

Cylinder dia.		180mm	230mm	270mm
No. cylinders		2	2	2
Height	mm	1000	1000	1000
Width	mm	450	550	700
Depth	mm	270	315	406
Weight	kg	12	15	19
Ref		SC100	SC101	SC102

Floor Stands for Cylinders



Cylindrical Stands

3 Cylinder sizes

A range of 3 portable stands.

Rolled and formed mild steel flat section,
fully welded throughout.

Finish: Blue epoxy

Hinged latch Stands

3 Cylinder sizes

2 hinged access latches secured by
wing nuts.

RSA and mild steel flat section, fully
welded throughout.

Heavy duty base plate and support.

Base plate pre-drilled for floor fixing
(fixings not supplied)

Finish: Blue epoxy



		Cylindrical Stands			Hinged latch Stands		
Cylinder dia.	mm	100	140	180	180	230	285
O/a height	mm	330	380	610	605	605	605
O/a dia./base	mm	310	345	420	420 x 420	420 x 420	420 x 420
Weight	kg	9	10	11	14	15	16
	Ref	SC11	SC12	SC13	SC17	SC18	SC19

Cylinder Trolleys

INDUSTRY
FAVOURITE

Welders Trolley

For convenient use of 1 Oxy. cylinder and 1 Acet.
cylinder with rods and cable holders.

Steel link retaining chains fitted.

Wheels: 400 mm dia. pneumatic or solid rubber
tyred wheels with roller bearings.

Finish: Blue epoxy.

Tandem Cylinder Trolley

Capacity 200 kg

Steel link retaining chain fitted.

Wheels: 2 x 250 mm dia. solid rubber tyres,
2 x 100 mm dia. rubber swivel castors.

Finish: Blue epoxy.

Model	Cylinder sizes mm	O/a H x W x D mm	Tyres	Wt. kg	Ref
Welders	230 & 265	1085 x 915 x 540	solid	32	SC114
			pneu	25	SC114P
Tandem	230 & 265	1070 x 475 x 1005	solid	34	SC115



SC114P



SC115

Cylinder Handling

Oxygen Cylinder Trolleys

Ideal for hospitals, medical centres, pharmaceutical companies and laboratories. Also industrial and factory medical services.

Easy to use
Quiet, Tough and
Smart in Red or
Grey epoxy

Fitted with revolving protective buffers as standard

Ideal for all medical services



Designed for cylinder dia.mm	Litre	O/a W x D x H mm	Wheel Dia mm	Wt kg	Red Ref	Grey Ref
140	1360	430 x 585 x 1100	160	11	SC08R	SC08G
175	3400	465 x 605 x 1100	200	12	SC09R	SC09G
230	6800	520 x 610 x 1100	200	13	SC10R	SC10G

Designed in accordance with BS 2718 1979



Anti static wheels 160/200 mm dia.

Protective rotating buffers fitted to front corners.

One piece safety loop handle

Secure butterfly screw crossbar fitting for both cradles

Top and bottom cradles both rubber lined for grip and noise reduction.

Finish: Grey or red epoxy.

Single Cylinder Trolley

Cylinder sizes: 230 & 275 mm dia.

Wheels: 200 mm dia. solid rubber
tyred roller bearing wheels.

Finish: Blue epoxy.

Bar handle models

Single bar handle and steel
link retaining chain.

Loop handle models

Loop handle and steel
retaining bar.

SC140

SC143

Type	Cylinder Dia. mm.	O/all H x W x D mm.	Wt. kg.	Ref
Bar handle	230	1170 x 430 x 450	9	SC140
	275	1170 x 475 x 450	10	SC141
Loop handle	230	1320 x 444 x 440	15	SC142
	275	1320 x 485 x 460	16	SC143

Tall Cylinder Support Trucks

Designed to carry cylinder loads on
3-wheel base, thus minimising operator
fatigue and risk.

Easy to load with bottom support bar (FP)
or flat foot plate (AR).

All models with 200 mm dia. wheels
with roller bearings.

FP models have stem fixing rear swivel
castor 100 mm dia. grey.

AR models have plate fixing rear swivel
castor 125 mm dia. rubber tyres.

Finish: Blue epoxy.

Series FP

Series AR

FP

Fixed single position
Max o/a front-rear 1200 mm

AR

Adjustable rake back
Max o/a front-rear 1350 mm

Series	Max/min Cyl dia mm	Overall W x H mm	Wt kg	Ref
FP	285 / 177	500 x 1060	23	SC144
	380 / 228	550 x 1100	23	SC145
AR	285 / 177	500 x 1140	25	SC146
	380 / 228	590 x 1140	25	SC147

Cylinder Handling



Designed for cylinders dia x H: 380 x 1250mm

Twin rear handles

Solid footplate and vertical side tubes with cylinder retention chain.

Wheels: 200 mm dia. solids, 260 mm dia. pneumatic

Finish: Blue epoxy Weight: 16 kg.

Solid tyre Ref: **SC16**

Pneumatic tyre Ref: **SC16P**

Propane and Calor Cylinder Trucks



Designed for cylinders dia x H: 380 x 1250mm

Single rear handle.

Steel cylinder hook plate and retention chain.

Wheels: 200 mm dia. solids, 260 mm dia. pneumatic

Finish: Blue epoxy. Weight: 10 kg.

Solid tyre Ref: **SC02**

Pneumatic tyre Ref: **SC02P**



Designed for cylinders dia x H: 325 x 535mm

T-bar handle. Steel cross member cylinder support and vertical sides with cylinder retention chain.

Wheels: 200 mm dia solid rubber tyres.

Weight: 10 kg. Ref: **SC15**



Designed for cylinders dia x H: 325 x 535mm

Single rear handle. Steel cylinder hook plate with cylinder retention chain.

Wheels: 160 mm dia. solid rubber tyres.

Weight: 8 kg. Ref: **SC03**

Stairclimber



Designed for cylinders dia x H: 325 x 535mm

Tubular construction with star wheel stair climb facility.

Continuous loop handle.

Tubular vertical side protection cylinder retention with retention chain.

Weight: 15 kg.

Ref: **SC21**



Cylinder lifting cradles

Cylinder cradle for use with overhead lifting gear

4-cylinder cradle has sheet steel base and

50mm dia. lifting eye.

6-cylinder cradle has open frame base and

twin lifting eyes suitable for fork lift.

Fork pocket to suit 150 x 50mm.

Fork pocket centres 600mm.

Top and bottom cylinder retention chains

Finish: Red epoxy.

All cradles tested to 100% overload - test certificate supplied.

cylinder capacity	cylinder dia. mm	load Capacity	O/A W x L x H mm	Wt kg	Ref
4	180-230	500kg	460 x 460 x 1850	22	SC4230
	230-305	500kg	610 x 610 x 1850	22	SC4305
6	180-230	750kg	815 x 680 x 1830	86	SC6230
	230-305	750kg	1040 x 680 x 1830	90	SC6305

Cylinder lifting trolleys

Combined cylinder trolley / lifting cradle.

One product allowing cylinders to be moved with either overhead lifting gear, or wheeled into position

Single cylinder lifting trolley

2 x 200mm dia solid rubber wheels and 50mm dia lifting eye

Top and bottom cylinder retention chains.

Finish: Red epoxy

Two cylinder lifting trolley

2 x 400mm dia rubber tyred wheels and a single 160mm dia swivel castor on rear support frame for added safety and manoeuvrability.

Top and bottom cylinder retention chains.

Finish: Red epoxy

All cradles tested to 100% overload, test certificate supplied.

cylinder capacity	cylinder dia. mm	load Capacity	O/A W x L x H mm	Wt kg	Ref
1	180-230	150	410 x 740 x 1870	23	SC25
	230-305	150	490 x 780 x 1870	24	SC26
2	180-230	250	790 x 685 x 1870	56	SC27
	230-305	250	940 x 760 x 1870	60	SC28



2 cylinder model with
Rear castor for
added safety and
manoeuvrability