

## Turntable trailers

### Phenolic Turntable Trailers

General purpose hand pulling turntable trailers with black, textured, anti-slip phenolic deck surface

Choice of load capacities: 500, 750 and 1000kg

#### 3 TYPES

- Flatbed platform;
- Removable phenolic end and side panels
- Wire mesh fixed ends and removable sides

Solid rubber or pneumatic tyred wheels, all roller bearing.  
Constructed from rectangular and round section steel tube.  
Finish: Red epoxy.



#### Trailer with flatbed platform

Capacity kg	Deck L x W	Deck height	Wheel Dia.	Wheel Type	Weight kg	ref
500	1200 x 600	450	250	Solid Pneu	44 41	TR321 TR321P
750	1500 x 750	500	400	Solid Pneu	89 63	TR326 TR326P
1000	1800 x 900	500	400	Solid Pneu	120 94	TR329 TR329P

#### Trailer with 200mm high removable Phenolic ends and sides

Capacity kg	Deck L x W	Deck height	Wheel Dia.	Wheel Type	Weight kg	ref
500	1200 x 600	450	250	Solid Pneu	53 50	TR341 TR341P
750	1500 x 750	500	400	Solid Pneu	137 111	TR342 TR342P
1000	1800 x 900	500	400	Solid Pneu	133 107	TR343 TR343P

#### Trailer with 400mm high wire mesh fixed ends and removable sides

Capacity kg	Deck L x W	Deck height	Wheel Dia.	Wheel Type	Weight kg	ref
500	1200 x 600	450	250	Solid Pneu	66 63	TR351 TR351P
750	1500 x 750	500	400	Solid Pneu	113 87	TR352 TR352P
1000	1800 x 900	500	400	Solid Pneu	152 126	TR353 TR353P



## Trader Truck Hand Turntable Trailers

- 3 deck sizes
- MDF or steel deck
- Solid rubber or pneumatic tyres
- Removable steel ends and sides option
- Loop handle
- Parking brake option

Fully welded construction from rectangular and round section steel tube.  
Metalwork finished in red epoxy  
Optional sides finished in light grey epoxy.

### Options

#### End / side panel kit

200mm high  
Corner posts fit into steel tubes and lock with simple bolt tightening.  
Formed steel side and end panels slot onto steel channels, reduces usable length and width by 50mm.



#### Tee bar handle

Factory fitted at time of manufacture as alternative to loop handle, at no extra cost.  
Add suffix "T" to reference.



#### Parking brake

Factory fitted at time of manufacture. Brake is applied when handle is raised to vertical position.  
Ref **PB1** extra



Deck size mm	Deck Height	Capacity	Wheels Dia,	Tyre type	MDF Deck Wt Kg	MDF Deck Ref	Steel Deck Wt Kg	Steel Deck Ref	End/side panel kit Wt Kg	End/side panel kit Ref (extra)
<b>1200 x 600</b>	370mm	350 Kg	200mm	Solid	37	<b>TR120</b>	42	<b>TR220</b>	14	<b>TR126SS</b>
	450mm	500 Kg	260mm	Pneumatic	39	<b>TR121P</b>	44	<b>TR221P</b>	14	<b>TR126SS</b>
<b>1500 x 750</b>	500mm	750 Kg	400mm	Solid	78	<b>TR126</b>	94	<b>TR226</b>	17	<b>TR157SS</b>
	500mm	750 Kg	400mm	Pneumatic	55	<b>TR126P</b>	71	<b>TR226P</b>	17	<b>TR157SS</b>
<b>2000 x 1000</b>	500mm	1000 Kg	400mm	Solid	120	<b>TR130</b>	149	<b>TR230</b>	22	<b>TR201SS</b>
	500mm	1000 Kg	400mm	Pneumatic	98	<b>TR130P</b>	127	<b>TR230P</b>	22	<b>TR201SS</b>



## Turntable Trailers

- 3 Platform Sizes
- Choice of Solid or Pneumatic Tyres
- available with choice of Flat Bed, Box or Drop-in Sides

Tongue and Groove Timber Decks



TR50P with PB1 parking brake

### AVAILABLE IN 3 VERSIONS

18 different options to which you can add an optional parking brake

#### Flat Bed

Traditional trailer with tongue and grooved timber deck without ends or sides.

#### Fixed head and tail boards with drop in sides

Trailer complete with fixed corner posts, 2 fixed ends infilled with tongue and groove timber. Drop in sides of tongue and groove timber. Sides 200mm high

#### Drop on Box Body

Trailer complete with drop on box body with corner steel angle frames, inner corner timber supports, infilled with tongue and groove timber fixed panels. Sides 200mm high. If you already have a flat bed and want a drop on box body only, prices are available on application.

## Hand Trailers

Easy to operate, with plate to plate turntable  
Welded construction from tube and steel angle.  
Solid axle assembly  
Loop towing handle

Metalwork finished in hammer blue air dry enamel paint  
Woodwork finished with clear polyurethane varnish.



Fixed head and tail boards, with drop-in sides

#### Optional extra for all trailers

##### Parking Brake

(Factory fitted at time of order)  
Brake applied to front wheels when the pull handle is raised to the fully vertical position.  
Wt 4kg Ref: **PB1**



Parking brake

Platform L x W	Platform height	Capacity Kg	Wheels Dia, mm	Tyre type	Flat Bed Wt Kg	Flat Bed Ref	Fixed ends, Drop in sides Wt kg	Fixed ends, Drop in sides Ref	Drop on Box Body Wt kg	Drop on Box Body Ref
1067 x 610	325	350	200	Solid	45	<b>TR40</b>	56	<b>TR40RS</b>	55	<b>TR40BX</b>
	355		260	Pneumatic	43	<b>TR40P</b>	54	<b>TR40RSP</b>	53	<b>TR40BXP</b>
1525 x 762	355	500	250	Solid	56	<b>TR50</b>	69	<b>TR50RS</b>	68	<b>TR50BX</b>
	355		260	Pneumatic	54	<b>TR50P</b>	67	<b>TR50RSP</b>	66	<b>TR50BXP</b>
1830 x 762	510	600	400	Solid	80	<b>TR70</b>	97	<b>TR70RS</b>	96	<b>TR70BX</b>
	510		400	Pneumatic	69	<b>TR70P</b>	86	<b>TR70RSP</b>	85	<b>TR70BXP</b>

## Cage Turntable Trailers

with detachable mesh sides

- Fixed mesh ends - detachable mesh sides
- Front turntable steering with T bar handle
- All welded RSA construction throughout
- Solid or pneumatic tyres
- Flush ply deck polyurethane coated
- Blue epoxy finish

Platform L x W mm	Platform Height mm	Wheel dia. and tyres	Cap Kg	Wt. Kg	Ref
1220 x 685	425	250 mm solid	600	102	<b>TR401</b>
	500	400 mm pneu	800	98	<b>TR401P</b>
1525 x 760	425	250 mm solid	600	122	<b>TR411</b>
	500	400 mm pneu	800	118	<b>TR421P</b>
	500	400 mm solid	1000	144	<b>TR421</b>
1830 x 915	425	250 mm solid	600	140	<b>TR431</b>
	500	400 mm pneu	800	136	<b>TR441P</b>
	500	400 mm solid	1000	162	<b>TR441</b>
2000 x 1000	500	400 mm solid	1000	174	<b>TR451</b>
	500	400 mm pneu	1000	148	<b>TR451P</b>




Mesh size 50 x 50 mm  
Panel heights above deck 760mm

# Turntable and Ackerman Trailers

69

## Turntable Steering

Front axle mounted ball race turntable.  
Highly manoeuvrable with tight turning circle.

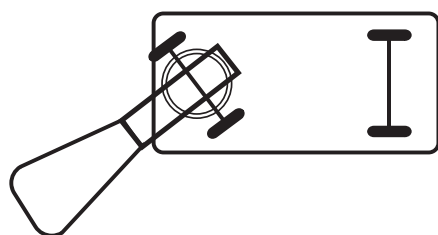

1 Tonne

hand pull turntable or  
ackerman steering


TR110P



TR112P

## Single Ackerman Steering

Front steering with rigid back axle.  
Limited turning circle with 100% stability

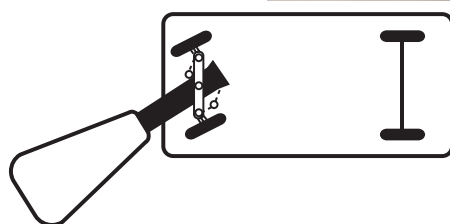

TR160

3 Options

Flat Bed

Headboard

Headboard Sides  
and Tailgate

## Trailers

Standard deck height 510 mm

- Braced and reinforced all steel welded chassis
- High quality polyurethane coated ply decks inset and finished flush.
- Protected all round by steel side frame
- Fixed optional headboard only or complete with drop down sides and tailgate. All with polyurethane coated ply panels
- Large 400 mm dia. roller bearing wheels with either solid or pneumatic tyres
- Hard wearing blue epoxy finish

## Handles

Loop handles are supplied as standard.  
T bar handles can be supplied at no extra cost.  
please specify T bar handle when ordering


UDL Capacity Deck size Wheel dia. x tread tyres	mm mm	1000 kg			
		1500 x 800		2000 x 1000	
		400 x 100 solid	400 x 110 pneumatic	400 x 100 solid	400 x 110 pneumatic
<b>TURNTABLE flat bed</b>	Wt. Ref:	112 kg <b>TR100</b>	85 kg <b>TR100P</b>	137 kg <b>TR110</b>	110 kg <b>TR110P</b>
<b>TURNTABLE with headboard</b>	Wt. Ref:	119 kg <b>TR101</b>	92 kg <b>TR101P</b>	145 kg <b>TR111</b>	118 kg <b>TR111P</b>
<b>TURNTABLE with headboard sides &amp; tailgate</b>	Wt. Ref:	142 kg <b>TR102</b>	115 kg <b>TR102P</b>	175 kg <b>TR112</b>	148 kg <b>TR112P</b>
<b>ACKERMAN flat bed</b>	Wt. Ref:	107 kg <b>TR150</b>	80 kg <b>TR150P</b>	129 kg <b>TR160</b>	102 kg <b>TR160P</b>
<b>ACKERMAN with headboard</b>	Wt. Ref:	114 kg <b>TR151</b>	87 kg <b>TR151P</b>	137 kg <b>TR161</b>	110 kg <b>TR161P</b>
<b>ACKERMAN with headboard sides &amp; tailgate</b>	Wt. Ref:	137 kg <b>TR152</b>	110 kg <b>TR152P</b>	167 kg <b>TR162</b>	140 kg <b>TR162P</b>



## Heavy Duty Trailers



Maximum towing speed 8 kph (5 mph)

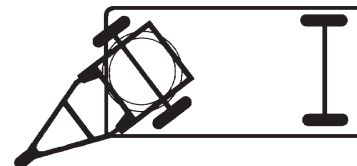

### Heavy Duty Towing Trailers

For in-plant operation

- Fully welded steel chassis.
- Anti-drop towbar 35mm tow eye.
- Rear hitch and pin.
- Finish blue epoxy.
- Flush ply decks - sanded and coated.

**Standard extras** - price on application

Fitted side and headboards.

Steel decks -- plain or chequer (Durbur) plate.

- Other sizes and capacities.
- Any superstructure designed to your needs.



Rear hitch and pin

Maximum UDL		1000 kg		2000 kg		3000 kg	
Deck height	mm	500	500	515	550	575	720
Wheels		Solid	Pneumatic	Solid	Pneumatic	Solid	Pneumatic
Dia x tread	mm	400 x 100	400 x 110	400 x 100	500 x 120	455 x 120	610 x 150
Deck 2 x 1m	Ref	Wt: 200 kg <b>TR601</b>	Wt: 185 kg <b>TR601P</b>	Wt: 220 kg <b>TR602</b>	Wt: 205 kg <b>TR602P</b>	Wt: 250 kg <b>TR603</b>	Wt: 235 kg <b>TR603P</b>
Deck 2.5 x 1.25m	Ref	Wt: 230 kg <b>TR611</b>	Wt: 215 kg <b>TR611P</b>	Wt: 250 kg <b>TR612</b>	Wt: 235 kg <b>TR612P</b>	Wt: 285 kg <b>TR613</b>	Wt: 270 kg <b>TR613P</b>

### 1000kg Long Load Towing Trailer

For in-plant operation

Welded steel construction with sturdy metal plat-forms and side frame superstructures.

Ball bearing turntable plates 405mm dia.

400mm dia. wheels with solid rubber tyres.

Finish: Blue epoxy.

Length	3800 mm
Drawbar	1500 mm
Platforms	800 x 300 mm
Load length	5 - 6 m
Weight	145 kgs

Ref: **TR502**

### 2000kg Pole or Timber Towing Trailer

For in-plant operation

Heavy steel tube centre pole welded to front cross bolster and turntable top frame.

Ball bearing turntable plates 610 mm dia.

Rear carriage adjustable at intervals of

305 mm to give length between bolsters

of 2 m minimum up to 3.9 m max.

Detachable chock posts 610 mm high.

Distance between posts 1115 mm.

Heavy duty triangular drawbar with 35 mm dia. towing eye, locks in vertical position when not in use. 'Stop' prevents drawbar from dropping below 230 mm from the ground.

Finish: Blue epoxy.

Wheels	Dia. x tread mm	Wt. kg	Ref
Solid rubber	405 x 100	300	<b>TR501</b>
Pneumatic 6 ply	460 x 125	285	<b>TR501P</b>



Loading height	660 mm
Overall width	1220 mm
Capacity	2000 kg

# Heavy Duty Ackerman Steering Trailers


71



Maximum towing speed  
8 kph (5 mph)

## Double Ackerman Steering

Front and rear steering for accurate tracking in train

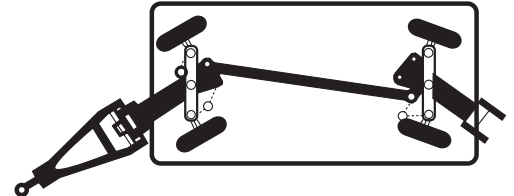

**Standard extras** - price on application

Fitted side and headboards.

Steel decks -- plain or chequer (Durbar) plate.

## Heavy Duty Towing Trailers

For in-plant operation

- Fully welded steel chassis.
- Flat bed flush ply decks - sanded and coated
- 35 mm tow eye - rear hitch and pin.
- Finish Blue epoxy



## Specials Service

As manufacturers we are able to offer custom built trailers with many styles and types of superstructure to suit individual requirements. Alternative deck sizes and capacities also available

Maximum UDL		1000 kg		2000 kg		3000 kg	
Deck height	mm	500	500	515	550	575	720
Wheels		Solid	Pneumatic	Solid	Pneumatic	Solid	Pneumatic
Dia x tread	mm	400 x 100	400 x 110	400 x 100	500 x 120	455 x 120	610 x 150
<b>Deck 2 x 1m</b>	Wt:	200 kg	185 kg	220 kg	205 kg	250 kg	235 kg
	Ref	<b>TR700</b>	<b>TR700P</b>	<b>TR710</b>	<b>TR710P</b>	<b>TR720</b>	<b>TR720P</b>
<b>Deck 2.5 x 1.25m</b>	Wt:	230 kg	215 kg	250 kg	235 kg	285 kg	270 kg
	Ref	<b>TR730</b>	<b>TR730P</b>	<b>TR740</b>	<b>TR740P</b>	<b>TR750</b>	<b>TR750P</b>

## Heavy Duty Ackerman Steering Trailers