

Sack truck safety

Protective Hand Grips

- Fitted as standard to all sack trucks without loop handles
- High impact, semi-flexible plastic.
- Comfortably contoured, protector runs full length of grip.



Also available for fixing to existing trucks. (hole for riveting to any 25mm outside dia. tube)
Colour choice: Red or yellow.
Red Ref **EC010**
Yellow Ref **EC034**

Load Straps

Designed to enable trucks to be fully utilized with larger loads, particularly when transporting a variety of products. Easy to use and a great help in cutting down the number of necessary journeys.


Snap on to 25mm outside dia. tube (covers most of our truck range). Integral friction locking buckle. The strap is simply pulled through into position Use for load retention only, not suitable for lifting.



Load Strap
Ref: **STP1**

N.B. Colour depends on current stock

Sack Trucks

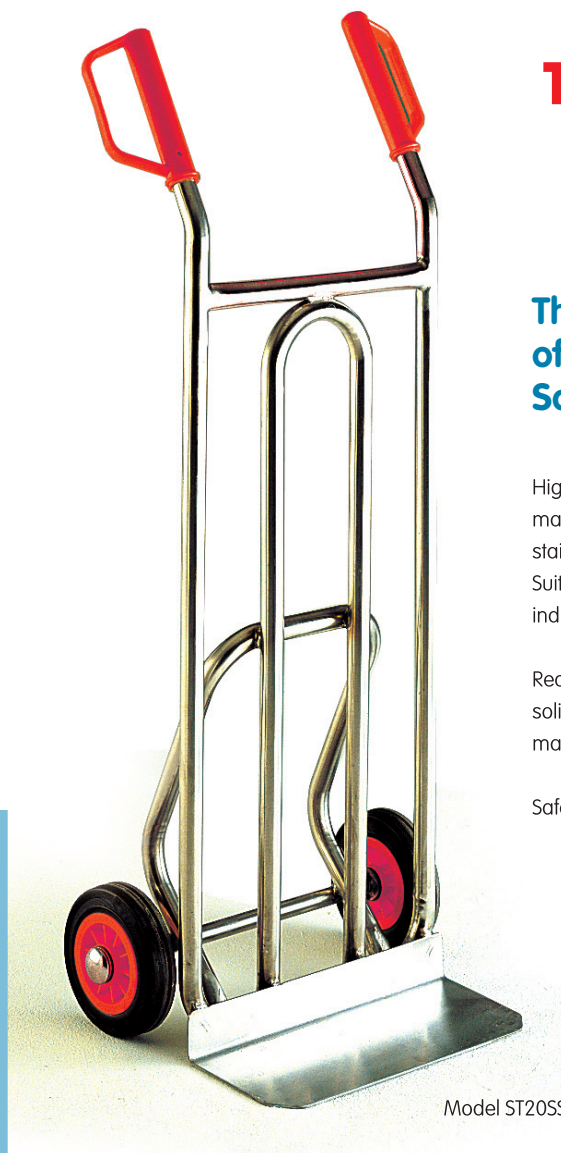

Model ST20SS



The Trader® Range of Stainless Steel Sack Trucks

High quality range of three sack trucks manufactured from sheet and tube stainless steel.
Suitable for use in the food and drink industry.

Red centred wheels, two models with solid rubber tyres, one model with pneumatic tyres.

Safety hand protectors fitted as standard.



Model ST21SS



Model ST06PSS

Model		ST20SS	ST21SS	ST06PSS
Capacity	Kg	150	200	200
O/a Height x Width	mm	1075 x 485	1175 x 535	1300 x 535
Toe L x W	mm	150 x 375	200 x 420	200 x 286
Back frame H x W	mm	805 x 370	965 x 420	1300 x 280
Wheel dia.	mm	160	200	260
Tyre		Solid	Solid	Pneumatic
Weight	kg	9	12	12
Ref		ST20SS	ST21SS	ST06PSS

Meticulous build quality
Red epoxy finish



Recommended optional
extra - Load Strap



Ref: **STP1**



A Trader Sack Truck Family

4 Plate toe models

4 Folding toe models



Large plate toe
model avail-
able with choice of
200mm dia solid
tyres: Ref **ST22**

or 260mm dia
pneumatic tyred
wheels: Ref **ST22P**
(illustrated)



Large folding toe
model avail-
able with choice of
200mm dia solid
tyres: Ref **ST22F**

or 260mm dia
pneumatic tyred
wheels: Ref **ST22FP**
(illustrated)



SOFTTRIDE PNEUMATICS

Ref: **ST20** Ref: **ST21** Ref: **ST22** Ref: **ST22P** Ref: **ST22FP** Ref: **ST22F** Ref: **ST21F** Ref: **ST20F**

150	200	250	250	Capacity kg	250	250	200	150
1070 x 495	1185 x 540	1300 x 610	1300 x 610	O/A H x W mm	1300 x 610	1300 x 610	1185 x 540	1070 x 495
150 x 375	200 x 430	250 x 500	250 x 500	Toe L x W mm	420 x 420	420 x 420	330 x 300	320 x 300
850 x 370	960 x 415	1070 x 500	1070 x 500	Frame H x W mm	1070 x 500	1070 x 500	960 x 415	850 x 370
160	200	200	260 (pneu)	Wheel dia mm	260 (pneu)	200	200	160
10	14	17	17	Weight kg	16	16	12	9
ST20	ST21	ST22	ST22P	Ref	ST22FP	ST22F	ST21F	ST20F

Sack Trucks

Versatile **Trader**® Truck

This modern sack truck is available in bright zinc plated or blue epoxy finish.

Choice of solid rubber or pneumatic tyres.
All welded steel construction, fitted with protective hand grips as standard.



Model
ST12/ZP



Model
ST12P/ZP



Recommended optional
extra - Load Strap



Ref: **STP1**

Specifications

Ref	ST12	ST12P	ST12/ZP	ST12P/ZP
Capacity	200kg	200kg	200kg	200kg
Back	curved	curved	curved	curved
Height	1100mm	1100mm	1100mm	1100mm
Width o/a	580mm	580mm	580mm	580mm
Frame width	400mm	400mm	400mm	400mm
Front/rear	440mm	500mm	440mm	500mm
Toe width	410mm	410mm	410mm	410mm
Toe depth	230mm	230mm	230mm	230mm
Toe type	solid	solid	solid	solid
Tyre dia	200mm	260mm	200mm	260mm
Tyre type	solid	pnev.	solid	pnev.
Finish	Blue	Blue	Zinc	Zinc
	Epoxy	Epoxy	Plated	Plated
Weight	12kg	13kg	12kg	13kg



Model
ST12


Model
ST12P



Traditional sack trucks

Traditional, strong, parallel back sack trucks with a multitude of uses

High load capacity trucks.
Fully welded construction from tube, bar and sheet steel.
Choice of straight or curved backs, and open or solid toes and backs, 160 and 200mm dia. solid rubber tyred wheels.
Finish: Blue epoxy.

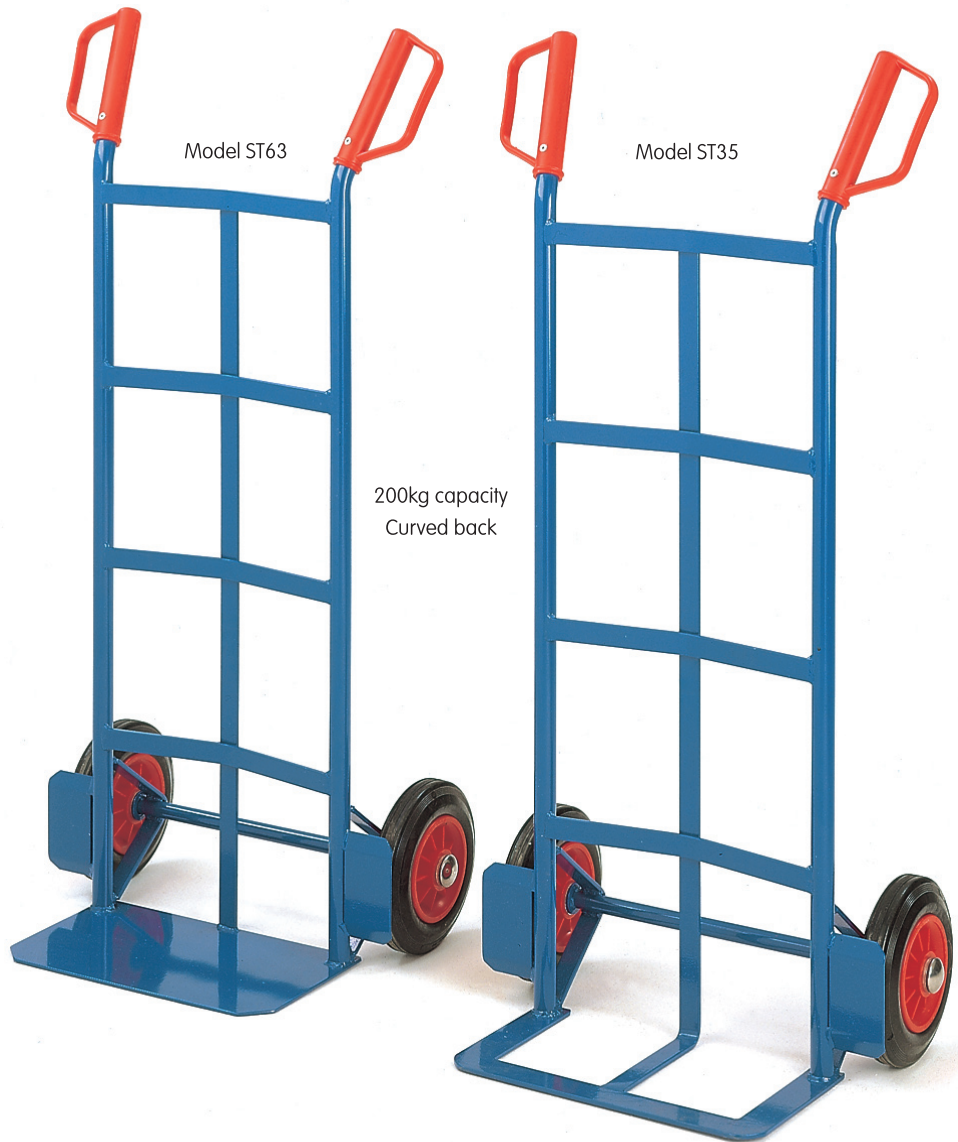

Recommended optional extra - Load Strap



Ref: **STP1**

Ref		ST63	ST35	ST61	ST62	ST02	ST52
Capacity	Kg	200	200	125	125	200	200
Back		curved	curved	curved	curved	flat	flat
		open	open	open	open	open	solid
Height	mm	1065	1065	965	965	1090	1090
Width o/a	mm	515	515	515	515	406	406
Frame width	mm	370	370	370	370	395	395
Front/rear	mm	420	420	380	380	450	450
Toe width	mm	380	380	380	380	406	406
Toe depth	mm	180	180	200	200	200	200
Toe type		solid	open	open	solid	solid	solid
Wheel dia	mm	200	200	160	160	200	200
Weight	Kg	14	14	10	10	11	15



Sack Trucks



Model
ST19

Model
ST15



Ref	ST19	ST15	ST53	ST54
Capacity	200kg	200kg	200kg	300kg
Back	flat	flat	curved	curved
Height	1150mm	1150mm	1095mm	1140mm
Width o/a	595mm	595mm	540mm	595mm
Frame width	400mm	400mm	380mm	400mm
Front/rear	225mm 600mm	480mm	465mm	500mm
Toe width	330mm	410mm	390mm	410mm
Toe depth	395mm	255mm	230mm	320mm
Toe type	open folding	solid	open	open
Tyre dia	200mm	200mm	200mm	250mm
Tyre type	solid	solid	solid	solid
Weight	14kg	16kg	21kg	23kg

Euro loop handle Trucks

Continuous loop handles give convenient handling at all angles.

Wide backs and choice of large fold-up toe or fixed toe plate, make these trucks very versatile.

Bright zinc plated wheels with black solid rubber tyres

Finish: Blue epoxy



Model
ST53

Model
ST54

Recommended optional
extra - Load Strap



Ref: STP1



**Models
ST53 and
ST54 lay
flat for easy
loading**

Model
ST06Model
ST06P

High backed Case Trucks

Ideally suited for the movement of cases, cartons and crates. High back allows for stacking of load.

Steel welded construction,
Finish: Blue epoxy.
Choice of solid rubber or
pneumatic tyres.

Recommended optional
extra - Load Strap



Ref: **STP1**

Specifications



Ref	ST06	ST06P
Capacity	200kg	200kg
Back	flat	flat
Height	1300mm	1300mm
Width o/a	450mm	490mm
Frame width	275mm	275mm
Front/rear	500mm	560mm
Toe width	290mm	290mm
Toe depth	230mm	230mm
Toe type	solid	solid
Tyre dia	200mm	260mm
Tyre type	solid	pneu.
Finish	Blue	Blue
	Epoxy	Epoxy
Weight	12kg	13kg



Carry Truck

- Carrying handle fits to the wheel end of the truck
- 2 people can carry loads over obstacles.
- Load protection rubber pads.



Capacity 250kg

260mm dia. pneumatic
tyred wheels with roller
bearings.
Overall H x W: 1130 x
610mm
Toe W x D: 450 x 180mm
Weight: 16kg
Finish: Blue epoxy

Ref: **ST14P**



Skid Truck

Useful where operator is likely to
encounter varying terrain and
obstacles.

The truck has red plastic rear protection
skid covers.


Max load 200kg Weight: 14kg
260mm dia. pneumatic tyred wheels
with roller bearings.

Overall H x W: 1300 x 490mm

Toe W x D: 290 x 230mm

Finish: Blue epoxy

Ref: **ST07P**

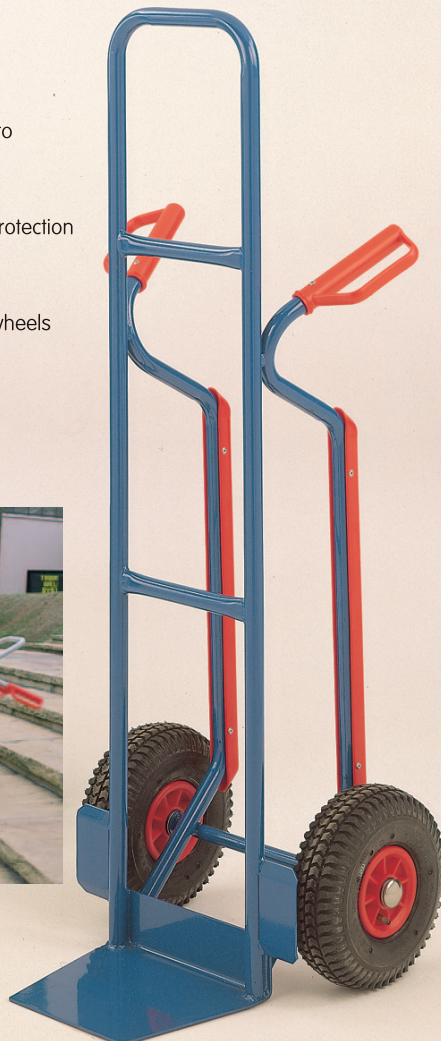

Traditional Sack Trucks

Traditional Splay-back Trucks

Still in constant demand throughout industry

- Capacity 200kg
- Choose from 3 toe iron sizes



An original design still meeting today's demands

Originally designed for use in markets, but suitable for many other applications.

All models are manufactured from tough welded angle and tube with a one piece toe iron and centre strap for increased load support.

200mm dia solid rubber or 250mm pneumatic tyred wheels with roller bearing centres.

Protective hand grips as standard

Finish: Blue epoxy

Ref		ST25	ST26	ST26P	ST27	ST27P
Capacity	kg	200	200	200	200	200
Back		curved	curved	curved	curved	curved
Height	mm	1170	1170	1170	1170	1170
Width o/a	mm	635	635	635	635	635
Frame width	mm	510	510	510	510	510
Front/rear	mm	445	520	588	672	740
Toe width	mm	355	355	355	355	355
Toe depth	mm	230	305	305	450	450
Toe type		open	open	open	open	open
Tyre dia	mm	200	200	260	200	260
Tyre type		solid	solid	Pneumatic	solid	Pneumatic
Finish		Blue epoxy	Blue epoxy	Blue epoxy	Blue epoxy	Blue epoxy
Weight	kg	17	18	18	20	20


Rough Terrain Truck 6 model range

Capacity 350kg

Choose from

- Solid or pneumatic tyres
- 3 toe iron sizes

Made for rough
ground and
tough work.

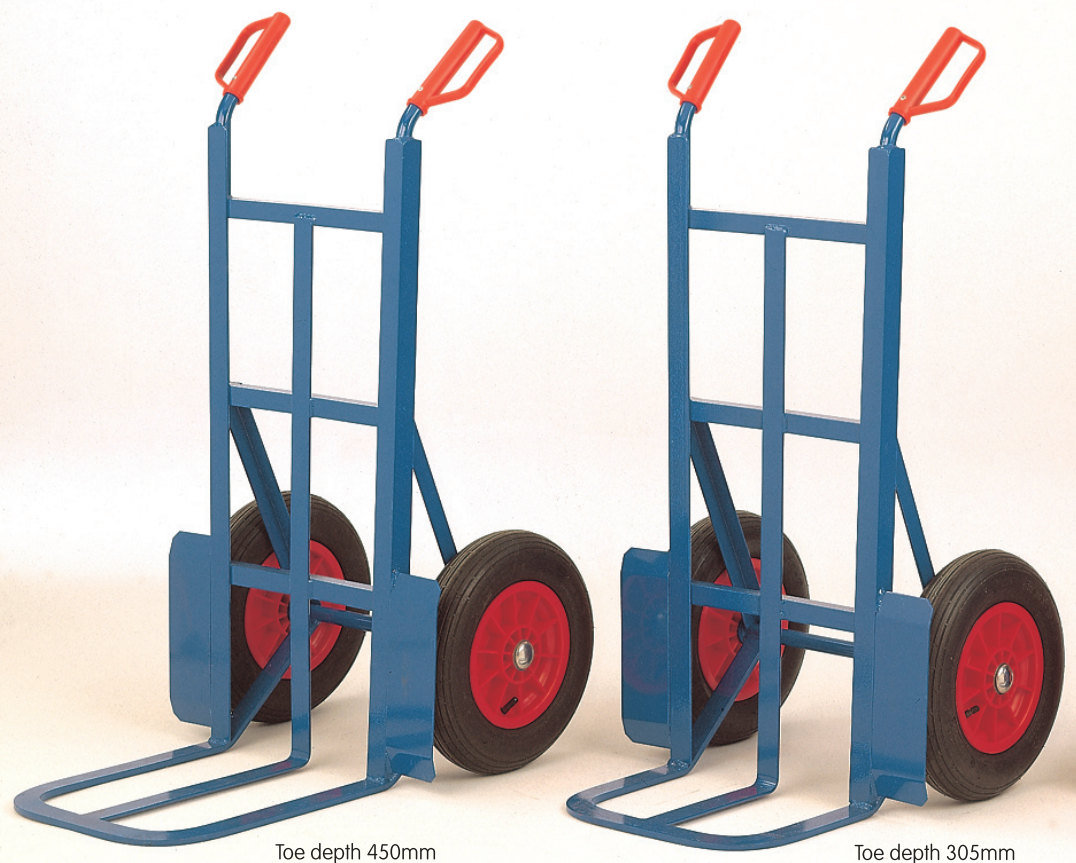

Toe depth 450mm


Toe depth 305mm







The large diameter wheels cope with rough and uneven ground with ease. Solid tyred wheels should be chosen if the truck is likely to frequently come in contact with sharp objects.

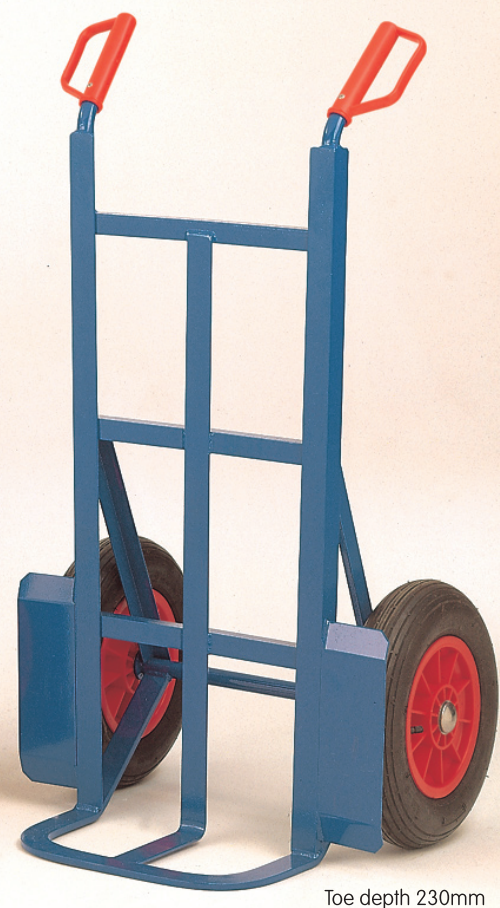The trucks are heavily built and very strong, coping easily with the maximum load rating of 350kg.

Protective handgrips are fitted as standard and this also helps handling over rough terrain.



Toe depth 230mm

MARKED PRODUCT							
Ref		ST10S	ST10P	ST101S	ST101P	ST102S	ST102P
Capacity	kg	350	350	350	350	350	350
Back		flat	flat	flat	flat	flat	flat
Height	mm	1140	1140	1140	1140	1140	1140
Width o/a	mm	605	605	605	605	605	605
Frame width	mm	430	430	430	430	430	430
Front/rear	mm	610	610	685	685	830	830
Toe width	mm	395	395	395	395	395	395
Toe depth	mm	230	230	305	305	450	450
Toe type		open	open	open	open	open	open
Tyre dia	mm	355	355	355	355	355	355
Tyre type		solid	pneu	solid	pneu	solid	pneu
Finish		Blue epoxy	Blue epoxy	Blue epoxy	Blue epoxy	Blue epoxy	Blue epoxy
Weight	kg	29	23	30	24	32	26

Stairclimber Sack Trucks

Stairclimber / sack truck

This sack truck is fitted with the star-wheel stairclimbing configuration, but it has a simple locking device which enables the star-wheel system to be locked, thus turning the stairclimber into a standard sack truck.

Loop handles provide convenience in use in both modes - either pushing or pulling.

Tubular steel construction with sheet steel toe.
Finish: Red epoxy.

The star wheel system also helps transportation over rougher ground.
This feature, together with the star wheel lock, provides the ideal solution to encountering varying terrain.



Locking star-wheel model

Capacity	Kg	200
O/a Height x Width	mm	1190 x 590
Toe L x W	mm	420 x 215
Back frame H x W	mm	1025 x 410
Wheel dia.	mm	160
Weight	kg	23
Ref		SM28



Recommended optional extra - Load Strap



Ref: **STP1**

Star-wheel locking device



By simply turning the locking handle, the star-wheel configuration is locked, turning the stairclimber into a standard sack truck.

Turning the handle back, reverts the truck to full stairclimbing use.

Chair shifters

Steel pan base takes the rear legs of the chairs

Base pan W x D: 585 x 155mm

Overall frame height 1295mm

Wheels: 200mm dia solid rubber or 260mm dia pneumatic



Office model ST81



Industrial model ST83



Stairclimber model SM31



Wheels	Wt. kg	Ref
Office models	Sandstone epoxy finish	
Solid tyres	12	ST81
Pneumatic	13	ST82
Industrial models	Blue epoxy finish	
Solid tyres	12	ST83
Pneumatic	13	ST84
Stairclimber model	Blue epoxy finish	
Solid tyres	18	SM31

Alternative support designs available



Stairclimber

Smart, robust sack trucks with stairclimbing star wheel configuration.



Folding open toe model



48
HOURS
DESPATCH

Construction

All welded tubular frame with integral loop handles
160mm dia steel centred wheels with roller bearings
and rubber tyres.

Finish: Red epoxy.

Choice of folding open toe or fixed solid toe.



These trucks are ideal for transporting bulky loads up and down steps or stairs, or over rough ground.

Folding open toe model

Capacity	Kg	200
O/a Height x Width	mm	1150 x 580
Toe L x W	mm	400 x 330
Back frame H x W	mm	1080 x 415
Wheel dia.	mm	160
Weight	kg	20
Ref		SM20

Fixed solid toe model

Capacity	Kg	200
O/a Height x Width	mm	1150 x 580
Toe L x W	mm	200 x 420
Back frame H x W	mm	1080 x 415
Wheel dia.	mm	160
Weight	kg	21
Ref		SM21



Recommended optional
extra - Load Strap

Ref: **STP1**



Fixed solid toe model

Stairclimber Sack Trucks

Stairclimbing Trucks



Fitted with star wheel system to provide the greatest ease in transporting loads up and down steps and stairways. Large toe folds and locks to frame for compact storage.



Model SM12



Ref		SM12	SM22
Capacity	kg	110	80
Back		flat	flat / folding
Height	mm	1090	1090 / 600
Width o/a	mm	470	470
Frame width	mm	305	305
Front/rear	mm	370 / 720	370 / 720
Toe width	mm	245	245
Toe depth	mm	350	350
Toe type		open	open
Tyre dia	mm	160	160
Tyre type		solid	solid
Finish		Blue epoxy	Blue epoxy
Weight	kg	14	14



Tradermate

Model
SM22 folds
for handy
storage and
transportation

The star wheel system also helps transportation over rougher terrain making these trucks ideal for locations with variable terrain.

Recommended optional extra - Load Strap



Ref: STP1

**SM13****Capacity: 240Kg**Tall back with loop handles
and solid steel toe**Stairclimbing Trucks**Fitted with star wheel system to provide the greatest ease in
transporting loads up and down steps and stairways.The star wheel system also helps transportation over
rougher terrain making these trucks ideal for locations with
variable terrain.

Ref		48 HOURS DESPATCH		48 HOURS DESPATCH	
		SM13	SM23	SM23P	SM16
Capacity	kg	240	250	125	200
Back		flat	flat	flat	flat
Height	mm	1300	1150	1150	1150
Width o/a	mm	460	595	595	595
Frame width	mm	280	400	400	400
Front/rear	mm	635	665	705	405 / 810
Toe width	mm	290	420	420	330
Toe depth	mm	230	300	300	405
Toe type		solid	solid	solid	open
Tyre dia	mm	160	160	200	160
Tyre type		solid	solid	Pneumatic	solid
Finish		Blue epoxy	Blue epoxy	Blue epoxy	Blue epoxy
Weight	kg	18	21	21	19

Recommended optional
extra - Load Strap

Ref: STP1


**SM23****Capacity: 250Kg**Euro loop handles
and solid steel toe

SM23P

SM23

SM16**Capacity: 200Kg**Euro loop handles
and folding open toe

SM16

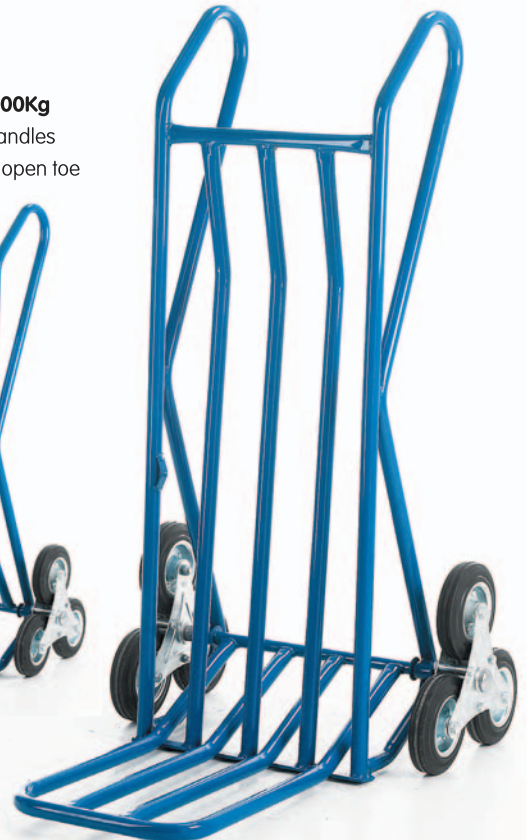

Convertible Sack Trucks

Model ST55

3-position Truck Capacity: 250Kg

Wheels: 200mm dia rubber tyred wheels
Rear castors: 100mm dia swivel castors with rubber tyres.
Tubular welded construction.
Solid toe plate L x W: 200 x 420mm
Finish: Blue epoxy



Positive retention in each truck position



Standard tubular deck

Wt: 17kg

Ref: **ST55**

48 HOURS
DESPATCH



Sack truck

O/A L x H x W: 460 x 1185 x 550mm

Strong and very versatile, these trucks have a multitude of uses



Platform truck

O/A L x H x W: 950 x 750 x 550mm

Effective platform L x H x W: 905 x 260 x 420mm

Tubular deck



4 wheel transporter

O/A L x H x W: 1110 x 880 x 550mm

Model ST17T

Standard 2-position Truck

Can be used as platform truck or as conventional sack trucks in the upright position.



Model ST17T

48 HOURS
DESPATCH



Square tube decks are perfectly satisfactory for many applications, but on some occasions a flat deck is preferred as it will cope with any size of parcel or boxed items, particularly in the platform position.

Effective Platform W x L : 508 x 825 mm

Capacity 200kg

Available with square tube decks or with additional ply platform.

Fitted with 2 fixed 200 mm dia. front castors and 100 mm dia. rear swivel castors.

Rubber tyred wheels.

Finish: Blue epoxy with a bright zinc plated handle.

Model ST17P

Ply deck 2-position Truck

Distribution trucks that are useful for retailers such as TV shops or white goods shops, where local delivery is all part of the service.



Model ST17P

Brakes: Total stop for both models

Ref: **B038**

Ref	Deck type	Solid toe projection x Width mm	Sack Truck o/all H mm	Platform deck H mm	O/all width mm	Wt kg
ST17T	Tubular	215 x 515	1250	250	515	22
ST17P	Ply	200 x 515	1250	260	515	25

Two and three Position Trucks

Three Position Convertible Sack Trucks

85

Model ST56

Super heavy duty
Capacity 400kg

Wheels: 200mm dia solid, or
260mm dia pneumatic, rubber
tyred wheels
Rear castors: 125mm dia swivel
castors with rubber tyres and roller
bearings.
Rectangular section and round tube
welded construction
Solid toe plate L x W: 200 x 475mm
Weight: 23Kg
Finish: Blue epoxy

Solid tyre Ref: **ST56**



Pneumatic tyre Ref: **ST56P**



Sack truck

O/A L x H x W:
ST56 / ST56P: 585 x 1250 x 480mm

4 wheel transporter

O/A L x H x W
ST56 / ST56P: 1170 x 930 x 480mm

Platform truck

O/A L x H x W
ST56 / ST56P: 1250 x 830 x 480mm
Effective platform L x H x W
ST56: 1085 x 250 x 475mm
ST56P: 1085 x 320 x 475mm



Positive
retention in
each truck
position

48
HOURS
DESPATCH

Trader models
ST55 and ST56 are
easy to change from
mode to mode.

Select mode
before loading

