

Centre Axle Platform Trucks

Double Ended Centre Axle Trucks Capacity 350kg UDL

with optional drop down sides

Tubular or steel panel end frames.

Sides available with panel ends only.

Sides are hinged on strong steel pins and securely latched.

Ideal for horticultural environments and many industrial applications

- Garden centres
- Markets and market gardens
- Show grounds and parks
- Builders and builders merchants
- Factory maintenance sections
- Schools, hospitals and institutions
- Docks and harbour boards



Fixed tubular ends

Deck height at centre line 460 mm



Fixed panel ends and drop down steel sides

Panel height above deck 230 mm



Angle deck frame with inset polyurethane coated plywood platform.

Fully welded chassis constructed from rectangular hollow section and tubular steel.

Sturdy tubular ground supports with welded steel protector pads.

Construction	Tyres	Effective deck W x L mm	Max overall W x L mm	Weight kgs	Ref
Fixed tubular ends	Solid	800 x 1500	800 x 1780	63	WT07
	Pneumatic			48	WT07P
Fixed steel panel ends	Solid	800 x 1500	800 x 1780	67	WT08
	Pneumatic			54	WT08P
Fixed panel ends and drop down steel sides	Solid	750 x 1500	860 x 1780 (sides dropped)	78	WT09
	Pneumatic			65	WT09P

Deck height: 460 mm at centre line

End and side panel height: 230 mm above deck.

Wheels: High quality red centres with roller bearings. 400 mm dia.

choice of solid rubber or pneumatic tyres.

Finish: Blue epoxy chassis and end panels
Grey epoxy drop down sides.

Warehouse Platform Trucks

35



Parcels trucks

500 kg capacity

With 3 fixed tubular sides.

Push handle one end.

Polyurethane coated ply platform flush fitted into angle frame chassis.

Finish: Blue epoxy

2 fixed 2 swivel castors with 200 mm dia. rubber tyred wheels. Roller bearings.

Deck size L x W mm	Overall L x W x H mm	Effective height mm	Deck height mm	Wt. kg	Ref
1000 x 700	1190 x 730 x 1575	1300	275	60	WT20
1200 x 800	1390 x 830 x 1575	1300	275	70	WT21

Optional extras

Bumper strip (Factory fitted)

for 1000 x 700 deck

Ref: **BS2**

for 1200 x 800 deck

Ref: **BS3****Total stop brakes**Ref (pair): **B013**

DIY Trolley

Capacity 450 Kg UDL

Sectioned trolley designed for the transportation of mixed products: Flat boards, boxes and tubes etc

Welded tube framework with flush fitting ply wood deck.

Overall L x W x H: 1000 x 600 x 1200mm

Deck height: 220mm


Rail heights from deck: 650 and 980mm

Castors: 2 swivel, 2 fixed 160mm steel centred wheels

with rubber tyres and roller bearings

Finish: Red epoxy

Weight: 36 Kg

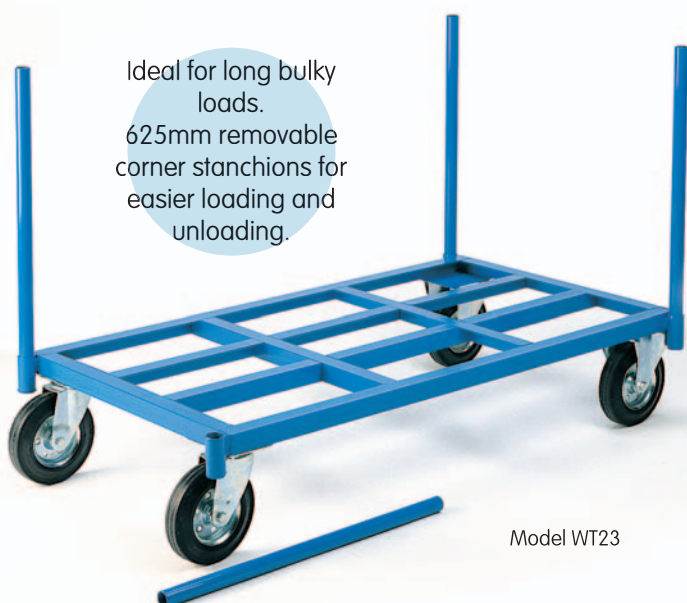Trolley ref: **TP37**Brakes: Total stop Ref: **B237** Extra (pair)

Ideal for long bulky loads.
625mm removable corner stanchions for easier loading and unloading.

Model WT23

Stanchion Trucks

2 deck sizes

2 Models: 500kg and 1000kg

Heavy duty fully welded construction.

Steel angle with tubular post pockets and 625mm stanchions.

Finish: Blue epoxy

2 swivel 2 fixed castors with 200 or 250 mm dia. rubber tyred wheels.

Bright zinc plated steel centres. Roller bearings.

Deck size L x W mm	Cap kg	Wheel dia. mm	Deck height mm	Wt. kg	Ref
1300 x 700	500	200	275	40	WT23
O/a: 1310 x 770	1000	250	355	50	WT24
1600 x 800	500	200	275	50	WT25
O/a: 1610 x 870	1000	250	355	57	WT26

Swan-neck Platform Trucks

3-wheel swan neck trolleys are extremely manoeuvrable and easy to handle.

Available in 3 deck types.

Strong tubular construction.



3-Wheel Swan-neck truck

Capacity 150 kg

Overall handle height: 870mm

Overall length: 910mm

Platform L x W: 600 x 450

Finish: Blue epoxy

Castor wheels and optional front total stop brake

LL10, 10P and 11: 2 fixed 125 mm dia. 1 swivel

100mm dia - all rubber tyred.

Brake ref **B038/1** (single)

LL12: 2 fixed 1 swivel 125mm dia - all rubber tyred.

Brake ref **B032/1** (single)

Ref	Deck 600 x 450 mm	Wt kgs
LL10	Open frame	8
LL10P	Ply platform	10
LL11	Steel platform	10
LL12	Loose basket	20

LL12 built with a square, angle top frame to accept white epoxy coated wire basket which is included.

Effective basket size: H 290 x W 375 x L 575 mm

4-Wheel Swan-neck truck

Capacity 200kg

The 4-wheel version swan neck range is now well established and popular. They take heavier loads than 3-wheelers and have slightly larger decks.



Overall handle height 870 mm

Overall length 910mm

Finish: Blue epoxy

Wheels:

125 mm dia. rubber tyred

2 fixed 2 swivel castors

Brakes: Total stop

Ref: **B032** (pair)

Ref	Deck 600 x 500 mm	Wt
LL13	Open frame	9kg
LL13P	Ply platform	12kg
LL14	Steel platform	13kg
LL17	Double decker-ply	18kg

Swan Platforms Without handles

4-wheel swan neck bases are available as platforms with 4 x 125mm dia swivel castors.

Ref	Deck	Wt kgs
LL15	Open frame	7
LL15P	Ply platform	10
LL16	Steel platform	11



LL17

Deck heights are 185 mm and 795 mm.

Junior Low Load Trucks

Useful Standard Junior Platform Size

Fixed or folding frame

Capacity 150kg

L x W: 850 x 450mm

O/A L x H 1070 x 1015mm

Strong welded tubular construction.
2 swivel, 2 fixed castors. 125 mm dia.
red centre wheels, roller bearings
and rubber tyres.
Finish: Blue epoxy.

Total stop brakes extra

Ref: **B032** (pair)



Model LL01P

Model LL31

Model LL31P

Maxi Low Load Trucks Capacity 250 kg

Large Standard Euro Platform - Fixed or folding frame

L x W: 1000 x 700 mm

O/A L x H: 1165 x 1055mm

Strong welded tubular construction.

2 swivel 2 fixed castors. 160 mm dia. red centre
wheels with roller bearings and rubber tyres.

Finish: Blue epoxy.

Total stop brakes extra

Ref: **B024** (pair)

Type	Deck L x W mm	Cap Kg	Deck Ht mm	O/A L x W x H mm	Wheel Dia	Wt Kg	Ref
Tubular	850 x 450	150	185	1070 x 450 x 1015	125	14	LL01
Tubular folding	850 x 450	150	185	1070 x 450 x 1015	125	14	LL31
Tubular	1000 x 700	250	228	1165 x 700 x 1055	160	25	LL02
Tubular folding	1000 x 700	250	228	1165 x 700 x 1055	160	25	LL32
Ply	850 x 450	150	197	1070 x 450 x 1015	125	17	LL01P
Ply folding	850 x 450	150	197	1070 x 450 x 1015	125	17	LL31P
Ply	1000 x 700	250	240	1165 x 700 x 1055	160	28	LL02P
Ply folding	1000 x 700	250	240	1165 x 700 x 1055	160	28	LL32P



Model LL02



Model LL02P



Model LL32



Model LL32P

Ply Panel Trucks Capacity 500 kg tubular frame chassis



Bumper strips extra

(factory fitted)

Deck size	ref
1000 x 700	BS2
1200 x 800	BS3

Side Frame Trucks

Designed for all-round load
retention with simple robust
construction.
Blue epoxy finish.

Platform L x W mm	Side height mm	Wheels dia. mm	Wt Kg	Ref
Ply side frames - removable				
1000 x 700	250	160	36	TCO74P
1200 x 800	250	160	40	TCO84P
Tubular side frames - fixed				
925 x 625	235	160	34	LL06

Tubular Frame Truck Capacity 250 kg Tubular frame chassis Ply deck



Wheels: 2 fixed 2 swivel castors.

Brakes: Total stop

Ref: **B024** Extra (pair)

Platform Trucks

Traditional Warehouse Platform Trucks

Capacity 500 kg

Tough and manoeuvrable. Single or double end.
End axles fitted with sliding self-centring wheel.
Centre balance wheels are housed in fixed castors.
All wheels 200 mm dia. with rubber tyres.
Deck height: 275 mm
Overall height: 1365 mm
End frame height: 1090 mm
Overall length: Single end - deck length + 210mm
Double end - deck length + 420mm

Deck size	mm	1000 x 700	1200 x 800	1520 x 800
Single end	Wt:	56 kgs	61 kgs	65 kgs
	Ref:	WT120	WT130	WT140
Double end	Wt:	61 kgs	65 kgs	68 kgs
	Ref:	WT220	WT230	WT240

Long Goods Platform Trucks

500 kg Capacity

Substantial timber deck. All steel welded frame.
2 swivel 2 fixed castors. 160 mm dia. rubber tyred roller bearing wheels.
Deck height 235 mm
Tubular O/a height 1035 mm. Tube retaining sides 800 mm
Timber O/a height 1035 mm. Load restraint height 520 mm
Brakes: Total stop Ref: **B024** Extra (pair)

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
2 straight sides	Wt:	40 kgs	41 kgs	47 kgs
Tubular	Ref:	TC605TB	TC705TB	TC805TB
2 straight sides	Wt:	41 kgs	43 kgs	49 kgs
Timber	Ref:	TC605P	TC705P	TC805P

48
HOURS
DESPATCH



250 Series

- 250kg Capacity
- 3 deck sizes
- Timber or mesh removable panels

Highly manoeuvrable
Turns almost
within own
length


48
HOURS
DESPATCH



General specification

250 series is identical to 500 series but with balance wheels and capacity of 250kg.

O/all length: Single end - Deck L + 85mm
Double end - Deck L + 145mm
O/all width: Deck W + 25mm
O/all height: 985mm
Load restraint height: 520mm



DIAMOND BALANCE WHEELS

This layout assists manoeuvrability
Trucks turn virtually in own length
10mm (approx) rocking balance
No brakes available

160 mm dia. wheels

Timber or mesh ends and sides



Series (cap kg)	250	250	250
Deck size	1000 x 600 mm	1000 x 700 mm	1200 x 800 mm
Deck only	TC006 Wt: 27 kg	TC007 Wt: 29 kg	TC008 Wt: 36 kg
Tubular end	TC106TB Wt: 31 kg	TC107TB Wt: 33 kg	TC108TB Wt: 41 kg
Single Timber end	TC106P Wt: 34 kg	TC107P Wt: 37 kg	TC108P Wt: 43 kg
Single Mesh end	TC106M Wt: 33 kg	TC107M Wt: 36 kg	TC108M Wt: 42 kg
Double Timber end	TC206P Wt: 40 kg	TC207P Wt: 42 kg	TC208P Wt: 50 kg
Double Mesh end	TC206M Wt: 39 kg	TC207M Wt: 41 kg	TC208M Wt: 49 kg
3-sided Timber	TC306P Wt: 45 kg	TC307P Wt: 48 kg	TC308P Wt: 56 kg
3-sided Mesh	TC306M Wt: 42 kg	TC307M Wt: 45 kg	TC308M Wt: 53 kg
4-sided Timber	TC406P Wt: 50 kg	TC407P Wt: 53 kg	TC408P Wt: 62 kg
4-sided Mesh	TC406M Wt: 45 kg	TC407M Wt: 48 kg	TC408M Wt: 57 kg

500 Series 500 kg Capacity Platform Trucks

Substantial timber deck. All steel welded frame.

2 swivel 2 fixed castors with rubber tyred roller bearing wheels.

Wheels 160mm dia. Deck height 235 mm.

O/all length: platform only - Deck L + 25mm

Single end - Deck L + 85mm

O/all width: Deck W + 25mm

48
HOURS
DESPATCH

Deck L x W mm	1000 x 600	1000 x 700	1200 x 800
Platform only ref:	Wt: 25 kgs TC600	Wt: 26 kgs TC700	Wt: 33 kgs TC800
Single end ref:	Wt: 29 kgs TC601TB	Wt: 30 kgs TC701TB	Wt: 38 kgs TC801TB



Optional extras:

Bumper strip

(factory fitted)

1000 x 600 deck

Ref: **BS1**

1000 x 700 deck

Ref: **BS2**

1200 x 800 deck

Ref: **BS3**

Total stop brakes (pair)

Ref: **B024**

Platform Trucks

500 Series

Platform Trucks

Choice of 3 deck sizes
Ply or Phenolic

General specification:

Deck height: 235 mm
Load restraint heights: 520 mm
Overall height: 985mm
Wheels: 160mm

Capacity
500kg
Mesh
panels

Substantial timber deck.
Blue epoxy finished frame with zinc plated mesh infill end and side panels.
All steel welded frames.
2 swivel 2 fixed castors, with 160mm dia rubber tyred roller bearing wheels.

All side and end panels removable.

48
HOURS
DESPATCH



Optional extras

Bumper strip

(factory fitted)
1000 x 600 deck
Ref: **BS1**
1000 x 700 deck
Ref: **BS2**
1200 x 800 deck
Ref: **BS3**

Total stop brakes (pair)

Ref: **B024**



Bumper strip and
total stop brake

Overall length:
Single end -
Deck L + 85mm

Double end -
Deck L + 145mm
Overall width:
Deck W + 25mm

With ply deck

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Single End		Wt: 30 kgs	Wt: 32 kgs	Wt: 37 kgs
	ref:	TC601M	TC701M	TC801M
Double End		Wt: 36 kgs	Wt: 38 kgs	Wt: 44 kgs
	ref:	TC602M	TC702M	TC802M
3 Sided		Wt: 39 kgs	Wt: 41 kgs	Wt: 48 kgs
	ref:	TC603M	TC703M	TC803M
4 sided		Wt: 42 kgs	Wt: 44 kgs	Wt: 52 kgs
	ref:	TC604M	TC704M	TC804M

With black phenolic deck

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Single End		Wt: 33 kgs	Wt: 35 kgs	Wt: 40 kgs
	ref:	TC101M	TC201M	TC301M
Double End		Wt: 39 kgs	Wt: 41 kgs	Wt: 47 kgs
	ref:	TC102M	TC202M	TC302M
3 Sided		Wt: 42 kgs	Wt: 44 kgs	Wt: 51 kgs
	ref:	TC103M	TC203M	TC303M
4 sided		Wt: 45 kgs	Wt: 47 kgs	Wt: 55 kgs
	ref:	TC104M	TC204M	TC304M





Capacity
500kg
Timber
panels



Hardwearing antislip phenolic coated decks

500 Series

Platform Trucks

Choice of 3 deck sizes - Ply or hardwearing antislip phenolic Substantial timber deck.

Blue epoxy finished frame with varnished plywood or phenolic end and side panels.

All steel welded frames.

2 swivel 2 fixed castors, with rubber tyred roller bearing wheels.

All side and end panels removable.

General specification:

Deck height: 235 mm

Load restraint heights: 520 mm

Overall height: 985mm

Wheels: 160mm



Optional extras

Bumper strip

(factory fitted)

1000 x 600 deck

Ref: **BS1**

1000 x 700 deck

Ref: **BS2**

1200 x 800 deck

Ref: **BS3**

Total stop brakes (pair)

Ref: **B024**



Bumper strip and
total stop brake

With ply deck and panels

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Single End		Wt: 31 kgs	Wt: 33 kgs	Wt: 38 kgs
ref:		TC601P	TC701P	TC801P
Double End		Wt: 37 kgs	Wt: 38 kgs	Wt: 45 kgs
ref:		TC602P	TC702P	TC802P
3 Sided		Wt: 42 kgs	Wt: 44 kgs	Wt: 51 kgs
ref:		TC603P	TC703P	TC803P
4 sided		Wt: 47 kgs	Wt: 49 kgs	Wt: 57 kgs
ref:		TC604P	TC704P	TC804P

With black phenolic deck and panels

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Single End		Wt: 34 kgs	Wt: 36 kgs	Wt: 41 kgs
ref:		TC101P	TC201P	TC301P
Double End		Wt: 40 kgs	Wt: 41 kgs	Wt: 48 kgs
ref:		TC102P	TC202P	TC302P
3 Sided		Wt: 45 kgs	Wt: 47 kgs	Wt: 54 kgs
ref:		TC103P	TC203P	TC303P
4 sided		Wt: 50 kgs	Wt: 52 kgs	Wt: 60 kgs
ref:		TC104P	TC204P	TC304P

Platform Trucks

Stainless Steel Range

Stainless steel platform trucks
500 kg capacity

High specification range of platform trucks suitable for the food and drink industry. Completely formed from 304 grade stainless steel sheet, tube and wire mesh.

2 swivel and 2 fixed stainless steel castors fitted with 200mm dia. rubber tyred wheels with red centres and stainless steel roller bearings.

3 platform sizes:

1000 x 600mm

1000 x 700mm

1200 x 800mm

Overall height 985mm

Deck height 295mm

Mesh panel height 480mm

Fixed mesh ends and removable mesh sides.

Capacity
500 kg
304 Grade
Stainless Steel



	Deck size 1000 x 600mm	Deck size 1000 x 700 mm	Deck size 1200 x 800 mm
Mobile base only Ref:	Wt: 33 kgs SP600	Wt: 35 kgs SP700	Wt: 40 kgs SP800
Single End Clear load area: Ref:	Wt: 37 kgs 930 x 600mm SP601M	Wt: 39 kgs 930 x 700mm SP701M	Wt: 45 kgs 1130 x 800mm SP801M
Double End Clear load area: Ref:	Wt: 41 kgs 860 x 600mm SP602M	Wt: 44 kgs 860 x 700mm SP702M	Wt: 50 kgs 1060 x 800mm SP802M
3 Sided Clear load area: Ref:	Wt: 44 kgs 860 x 555mm SP603M	Wt: 47 kgs 860 x 655mm SP703M	Wt: 54 kgs 1060 x 755mm SP803M
4 sided Clear load area: Ref:	Wt: 47 kgs 860 x 510mm SP604M	Wt: 50 kgs 860 x 610mm SP704M	Wt: 58 kgs 1060 x 710mm SP804M

Optional extras

Bumper strip (factory fitted)

1000 x 600 deck

Ref: **BS1**

1000 x 700 deck

Ref: **BS2**

1200 x 800 deck

Ref: **BS3**

Total stop brakes

Ref (pair): **B229**

700 Series

Platform Trucks

Choice of 3 deck sizes

General specification:

Deck height: 285 mm
Load restraint heights: 520 mm
Overall height: 1040mm
Wheels: 200mm

Capacity
700kg
Ply or Mesh
panels

Substantial timber deck.

Finish: Red epoxy frame with choice of ply or zinc plated mesh infill end and side panels.

All steel welded frames.

2 swivel 2 fixed castors, with rubber tyred roller bearing wheels.

All side and end panels removable.

48
HOURS
DESPATCH



Overall length:

Single end - Deck L + 85mm

Double end - Deck L + 145mm

Overall width: Deck W + 25mm

Bumper strip and
total stop brake



Optional extras

Bumper strip

(factory fitted)

1000 x 600 deck Ref: **BS1**

1000 x 700 deck Ref: **BS2**

1200 x 800 deck Ref: **BS3**

Total stop brakes (pair)

Ref: **B073**



Varnished ply panels

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Single End		Wt: 38 kgs	Wt: 40 kgs	Wt: 47 kgs
ref:		PT601P	PT701P	PT801P
Double End		Wt: 44 kgs	Wt: 47 kgs	Wt: 55 kgs
ref:		PT602P	PT702P	PT802P
3 Sided		Wt: 49 kgs	Wt: 52 kgs	Wt: 61 kgs
ref:		PT603P	PT703P	PT803P
4 sided		Wt: 54 kgs	Wt: 57 kgs	Wt: 67 kgs
ref:		PT604P	PT704P	PT804P

Zinc plated mesh panels

Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Single End		Wt: 37 kgs	Wt: 39 kgs	Wt: 46 kgs
ref:		PT601M	PT701M	PT801M
Double End		Wt: 43 kgs	Wt: 45 kgs	Wt: 52 kgs
ref:		PT602M	PT702M	PT802M
3 Sided		Wt: 47 kgs	Wt: 49 kgs	Wt: 56 kgs
ref:		PT603M	PT703M	PT803M
4 sided		Wt: 51 kgs	Wt: 53 kgs	Wt: 60 kgs
ref:		PT604M	PT704M	PT804M

Platform Trucks



Colour Range

Coloured platform trucks
700 kg capacity

High quality powder coated decks in a range of attractive colours, with bright zinc plated fixed mesh ends and removable sides.

2 swivel and 2 fixed castors with 200mm dia. rubber tyred wheels with bright zinc plated centres and roller bearings.

3 platform sizes:

1000 x 600mm

1000 x 700mm

1200 x 800mm

Overall height 985mm

Deck height 295mm

Mesh panel height 480mm

End panels fixed, side panels removable



Deck colours: Blue as standard,
green, yellow or red at no extra cost.



Choice of 4 deck colours

L x W	Deck size 1000 x 600mm	Deck size 1000 x 700 mm	Deck size 1200 x 800 mm
Single End Clear load area: Blue ref: Green ref: Yellow ref: Red ref:	Wt: 37 kgs 930 x 600mm EP601MB EP601MG EP601MY EP601MR	Wt: 39 kgs 930 x 700mm EP701MB EP701MG EP701MY EP701MR	Wt: 45 kgs 1130 x 800mm EP801MB EP801MG EP801MY EP801MR
Double End Clear load area: Blue ref: Green ref: Yellow ref: Red ref:	Wt: 41 kgs 860 x 600mm EP602MB EP602MG EP602MY EP602MR	Wt: 44 kgs 860 x 700mm EP702MB EP702MG EP702MY EP702MR	Wt: 50 kgs 1060 x 800mm EP802MB EP802MG EP802MY EP802MR
3 Sided Clear load area: Blue ref: Green ref: Yellow ref: Red ref:	Wt: 44 kgs 860 x 555mm EP603MB EP603MG EP603MY EP603MR	Wt: 47 kgs 860 x 655mm EP703MB EP703MG EP703MY EP703MR	Wt: 54 kgs 1060 x 755mm EP803MB EP803MG EP803MY EP803MR
4 sided Clear load area: Blue ref: Green ref: Yellow ref: Red ref:	Wt: 47 kgs 860 x 510mm EP604MB EP604MG EP604MY EP604MR	Wt: 50 kgs 860 x 610mm EP704MB EP704MG EP704MY EP704MR	Wt: 58 kgs 1060 x 710mm EP804MB EP804MG EP804MY EP804MR

Optional extras

Bumper strip

(factory fitted)

1000 x 600 deck

Ref: **BS1**

1000 x 700 deck

Ref: **BS2**

1200 x 800 deck

Ref: **BS3**

Total stop brakes

Ref: **B073** (pair)



Comprehensive range of bright zinc plated platform trucks from basic platform to 4 mesh sides.

Choice of 3 deck sizes.

Steel chassis with steel deck.

2 swivel 2 fixed castors housing 200 mm dia. rubber tyred roller bearing wheels with bright steel centres.

Series 700

700kg capacity
Bright Zinc Plated

General Specification

Maximum load 700kg

Deck height 295mm

Load restraint height 480mm

Overall height 985mm



Deck size	mm	1000 x 600	1000 x 700	1200 x 800
Platform Only				
Ref:		Wt 35 kg ZP600	Wt: 38 kg ZP700	Wt: 45 kg ZP800
Single Fixed Tube End				
Clear load area:		930 x 600	930 x 700	1130 x 800
Ref:		Wt 38 kg ZP601T	Wt: 41 kg ZP701T	Wt: 49 kg ZP801T
Single fixed mesh End				
Clear load area:		930 x 600	930 x 700	1130 x 800
Ref:		Wt 39 kg ZP601M	Wt: 42 kg ZP701M	Wt: 49 kg ZP801M
Double fixed mesh End				
Clear load area:		860 x 600	860 x 700	1060 x 800
Ref:		Wt 43 kg ZP602M	Wt: 46 kg ZP702M	Wt: 54 kg ZP802M
3 Sided (1 removable)				
Clear load area:		860 x 555	860 x 655	1060 x 755
Ref:		Wt 46 kg ZP603M	Wt: 49 kg ZP703M	Wt: 58 kg ZP803M
4 Sided (2 removable)				
Clear load area:		860 x 510	860 x 610	1060 x 710
Ref:		Wt 49 kg ZP604M	Wt: 52 kg ZP704M	Wt: 62 kg ZP804M
2 Fixed Mesh Sides				
Clear load area:		860 x 600	860 x 700	1060 x 800
Ref:		Wt 45 kg ZP605M	Wt: 48 kg ZP705M	Wt: 56 kg ZP805M

Smart durable Zinc finish

Fixed ends and removable long sides, bright zinc plated mesh infill.
Mesh panel height 480mm

Optional extras

Bumper strip

(Factory fitted)

1000 x 600 deck

Ref: **BS1**

1000 x 700 deck

Ref: **BS2**

1200 x 800 deck

Ref: **BS3**



Total stop brakes

Ref (pair): **B073**



Skips and Bins



Tipping Plastic Skip Bins

Moulded food grade polythene tank
Easy to clean, resists most hazardous liquids
Tank supported by tubular steel frame
Finish: blue epoxy.

Manual tipper

Welded tubular steel frame supports tank in both upright and tipping positions.

Wheels:

380 ltr tank - 2 x 200mm dia solid tyred wheels and 1x 100mm dia braked swivel castor with solid rubber tyred wheel.

650 and 900 ltr tanks - 2 x 250mm dia solid tyred wheels and 1x 100mm dia braked swivel castor with solid rubber tyred wheel.

Self tipper

Welded tubular steel frame and support mechanism with simple lever activated tipping release.
Single hinged handle aids tipping when raised on fork lift truck.
Fork pockets fitted as standard.

Wheels:

2 x 125mm dia fixed front castors and 2 x 125mm braked swivel rear castors with nylon wheels and roller bearings.



Capacity Ltrs	Type	Overall dims L x W x Hmm	Wt. Kgs	Ref
380	Manual tipper	1490 x 750 x 810	40	SB17
380	Self tipper	1440 x 860 x 960	70	SB27
380	Tank only	1350 x 750 x 680	16	PC117
650	Manual tipper	1780 x 770 x 1000	55	SB18
650	Self tipper	1730 x 860 x 1120	85	SB28
650	Tank only	1640 x 770 x 840	24	PC118
900	Manual tipper	1920 x 870 x 1085	70	SB19
900	Self tipper	1870 x 1010 x 1145	100	SB29
900	Tank only	1780 x 840 x 920	30	PC119



Tilting Skip Bin Capacity up to 400kg

Fabricated sheet steel body mounted on square frame chassis.
Reinforced body rim. No sharp edges.
Handle for pushing and load dumping.
Load will not tip until retaining latch is released by the operator.
Welded fork guides are available on request.

Capacity	250 kg	400 kg
Body size L x W x H mm	1050 x 580 x 525	1200 x 630 x 700
Overall size L x W x H mm	1175 x 850 x 790	1320 x 900 x 970
Weight	68kg	75kg
Ref	SB08	SB10
Including perf. base & drain tap		
Weight	71kg	78 kg
Ref	SB08DT	SB10DT



Finish: Blue epoxy

Wheels: 200 mm dia. axle mounted front wheels with single 200 mm dia. rear swivel castor, fitted with solid rubber tyres and roller bearings.

Brake: Total stop brake on single swivel castor extra Ref: **B013/1**

Loose fitting perforated base and drain tap.

Wheelbarrow Skip

Capacity 250kg

Fully welded construction in sheet steel with formed top edge and front nose strengthening.

Tubular push handle continues down length of body for extra strength.

Front and rear tubular supports allow for static and tipping use.

Wheels: Fully supported tubular axle fitted with choice of 400mm dia.solid rubber or pneumatic tyred wheels with roller bearings.

Finish: Blue epoxy.



body dims. L x W x H mm	o/a dims. L x W x H mm	Wt. Kgs	Wheels type	Ref
1155 x 625 x 460	1650 x 900 x 680	58	Solid	SB12
		47	Pneumatic	SB12P

Water Bin and Carrier

Lift-off water container

Heavy galvanised finish with wired rim and pouring lip.

Transporter


Finish: Blue epoxy with plastic hand grips

Wheels: 400 mm dia. soft ride pneumatic tyred wheels, or 400mm dia solid rubber tyred wheels, both with roller bearings.

Overall L x W x H: 1270 x 787 x 700 mm

Capacity 135 litres

For simple
transportation
and pouring
of liquids

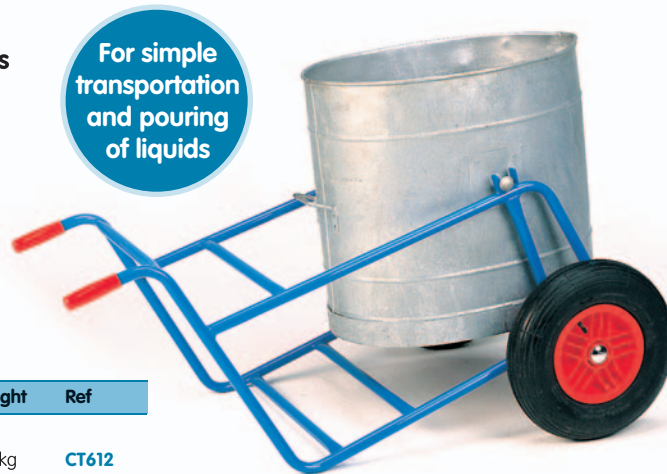

	Weight	Ref
Carrier complete with bin		
Solid rubber tyres	47kg	CT612
Pneumatic tyres	34kg	CT612P
Additional Water Bins	9kg	PC009

Narrow Aisle Drum truck

Capacity 300kg

Overall width of truck is less than a standard 210 ltr drum

Use as truck for transporting and stand for dispensing without moving drum.

Locking rod secures drum to truck in upright position and doubles as support stabiliser when in pouring position.

Overall L x W x H: 1420 x 490 x 1090mm

Dispensing height: 390mm

Wheels: 4 x 200mm dia polyurethane wheels with roller bearings.

Finish: blue epoxy

Weight 30kg

Ref: **DT62**

